

# KwikDraw-A 191-8/16




## Features

Key features:-

- 1U 19" LCD console drawer
- 104-key keyboard with touchpad or trackball
- New enhanced aesthetics with moulded front handle
- 2 post rack mounting available
- 8 or 16 port KVM
- Hot pluggable, no software or drivers required
- Easy & quick installation

## Dimensions

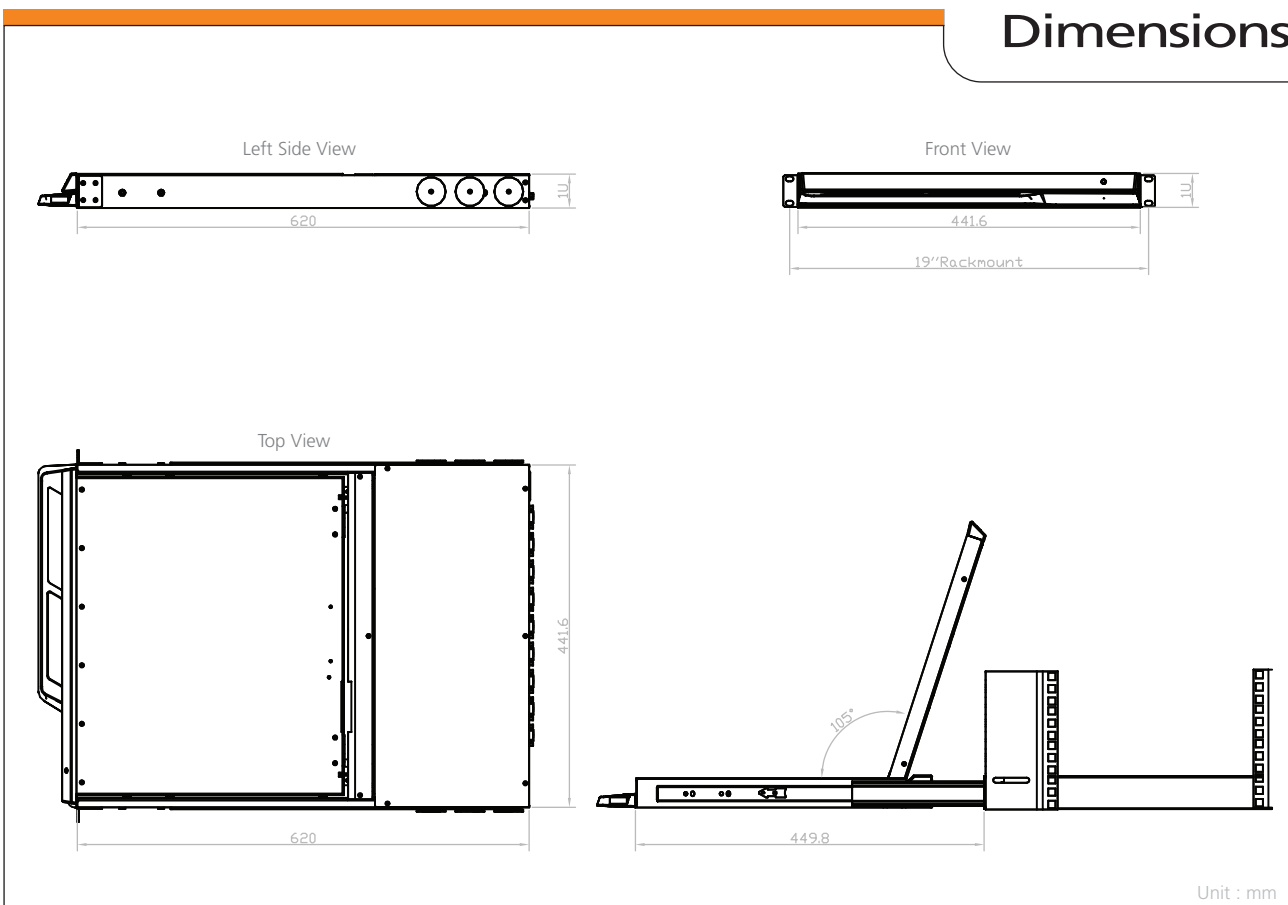



# KwikDraw-A 191-8/16

## Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

### Console


LCD Panel	Size (diagonal): 19" TFT Max resolution: 1280 x 1024 Brightness (cd/m <sup>2</sup> ): 250 Backlight: LED Colours: 16.7 M Contrast ratio (typ): 1000 : 1 Viewing angle (H/V): 170° x 160° Active area (mm): 376 x 301 MTBF (hrs): 30,000 Signal input: VGA	Regulatory	Safety: cUL, FCC & CE certified Environmental: RoHS2 & REACH compliant
Casing Colour	Black (RAL 9005)	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 48 Watt, Standby 5 Watt
Weight	Net: 12.7kgs (27.9lbs) Gross: 17.3kgs (38.1lbs)	Environmental	Operating: 0 to 55°C Storage: -5 to 60°C Relative humidity: 5-90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 5-500Hz 1G RMS random vibration
Dimensions (W x D x H)	Product: 441.6 x 500 x 44 mm (17.4 x 19.7 x 1.73 in) Packing: 590 x 808 x 140 mm (23.2 x 31.8 x 5.5 in)		

### KVM

KVM Port	Number of ports: 8 or 16 Connector: DB-15 combo connector Connectivity: Combo 4-in-1 KVM cable, up to 6, 10 & 15 feet	Regulatory	Safety: cUL, FCC & CE certified Environmental: RoHS2 & REACH compliant
Local Console	Graphic connector: 1 x DB-15 VGA Resolution: Up to 1920 x 1080 / 1920 x 1200 Input device: 2 x USB type A for keyboard & mouse	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Option DC: 12V / 24V / 48V / 110 ~ 125V DC input Consumption: Max. 24 Watt, Standby 5 Watt
Weight	Net: 8 port - 2.4kgs (5.3lbs), 16 port - 2.6kgs (5.7lbs) Gross: 8 port - 3.9kgs (8.6lbs), 16 port - 4.2kgs (9.2lbs)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58-100Hz / 0.98G (11ms / cycle)
Dimensions (W x D x H)	Product: 443 x 171 x 44 mm (17.4 x 6.7 x 1.73 in) Packing: 500 x 400 x 90 mm (19.7 x 15.7 x 3.5 in)	Management	Multilingual OSD: English, France, German, Spanish, Italian, Russian, Simplified Chinese, Japanese Hotkey combination: Scroll-lock, Cap-lock, Num-lock, Alt, Ctrl & Win Security: Password enable & disable, up to 8 users profile for port access PC Selection: Front button, OSD menu & hotkey
Expansion	Up to 128 servers by 8-level cascade		
Compatibility	Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix		

## Rear ports

### 8 Port

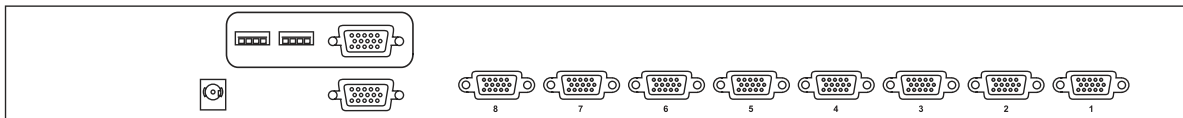

### 16 Port

