



# CONTACTLESS ROTARY POSITION SENSORS

Innovation In Motion

# INNOVATION IN MOTION

The Penny+Giles contactless rotary position sensors have been specially developed to provide maximum performance under extremes of temperature, humidity, vibration, shock and immersion. Using the latest advances in 12bit Hall effect sensing technology, this expanded range of new generation sensors are factory programmed to provide the user with a wide range of previously unavailable options, including single or dual redundant outputs, clockwise or anticlockwise rotation and measurement angles from 0-20° to 0-360° in 1° increments.

This sensor range is ideally suited to operate in extremely hostile applications that are typical in motorsport, off-road specialist vehicles, military vehicles and heavy industrial machinery.

## Contactless magnetic rotary sensor IC

The NRH/TPS/SRH series use a high performance, factory programmable 12 bit magnetic rotary sensor IC that includes integrated Hall elements and digital signal processing. The angular position information is provided by a magnet integrated with the sensor's shaft, or supplied separately. The sensor provides a pulse width modulated signal or an absolute analog voltage signal. Most models are designed to operate from either a 5Vdc regulated or 9-30Vdc unregulated supply, with a high stability circuit and EMC immunity to 100V/m.



### Features

- Contactless technology
- Absolute analog or digital (PWM) output
- Measuring range from 20° to 360° in 1° increments
  - Single or Dual outputs
- Temperature error less than 50ppm/°C
  - Rugged housing and shaft designs
  - Protection up to IP69K
- Choice of shaft attachments and mountings
  - Rapid despatch of any option
  - CE approved

### Benefits

- Long life and impervious to dither vibration
- No loss of position on power down
- Maximum sensitivity in all applications
- Optional redundant output for safety critical applications
- Maximises system accuracy over temperature range
- Suitable for extreme environments
- Operation in hostile environments including pressure washing
- Interchangeable with existing installations
- Eliminates customer inventory
- Confidence in EMC performance



#### EMC Directive 2004/108/EEC

The products detailed in this document have been tested to the requirements of EN 61000-4-3 (Immunity).



#### Quality Assurance

Penny+Giles are accredited to BS EN ISO9001:2008. Quality is at the heart of all our systems ensuring the reliability of our products from initial design to final despatch.

Certificate No. LRQ 0924881

### Design Statement

The design of models SRH501P and SRH502P are subject to Community Registered Design No 000961610-0001.

The majority of our designs include an input protector circuit (Patent number GB2418083).

## Innovative, rugged designs - superior protection

All models in our range have been designed to offer the best combination of materials and mounting styles that ensure survivability in the most rugged applications. We use sealing systems and cable connections that offer superior protection against the most hostile of operating conditions.

## Impressive environmental capability

Designed with 21st century applications in mind most of our models can withstand operating temperatures from -40°C to +140°C (+170°C for 72 hours with our NRH and TPS models) and have been tested to withstand severe shock and vibration. All sensors have protection to at least IP68 rating, with some models offering protection to IP69K. With an EMC immunity of 100V/m, these position sensors are ready for the harshest applications.

## Superior performance

This range of sensors has an impressive performance specification and most can operate from a 5Vdc regulated or 9 – 30Vdc supply. Outputs can be PWM or analog voltage (nominal 0.5 - 4.5Vdc) over the measurement range, with clockwise or anticlockwise shaft rotation. A choice of 341 different electrical angles from 20° to 360° are possible. 12 bit resolution (0.025%) is available over the selected measuring range, with a non-linearity better than ±0.4% and temperature stability better than ±50ppm/°C. The sensor's analog output option has a very low output noise level of less than 1mV rms.

## World leading availability

All models have been 'designed for manufacture' which enables assembly in state-of-the-art manufacturing cells. This means that we can supply any of the configurations possible from the options offered, in a matter of days from ordering. This allows OEMs to reduce or eliminate their inventory, and call on Penny+Giles to supply 'on demand'.

## Performance assured\*

Penny+Giles product development process includes exhaustive qualification testing to ensure that performance specifications published in our product brochures and technical data sheets are backed by real-life test evidence. This is our assurance to you that our designs have been tested at these parameters.

\* The qualification and suitability of these products in any customer specific application is the responsibility of the customer, unless otherwise agreed with Penny+Giles.

## Selection Guide

Penny+Giles offers the widest choice of options to suit your unique application. We can also offer a custom design service if one of our standard models does not suit your requirements.

### NRH280DP



- Dual output
- 6.5mm deep with metal flange
- Separate magnet assembly
- Sealed to IP69K
- Raychem™ DR25 cable

### NRH285DR



- Dual input/dual output version of NRH280DP
- 5Vdc operation only

### SRH220DR



- Dual input/dual output
- 28 x 38mm body with crush proof flange
- Sealed to IP68
- Integrated connector

### SRH280P



- Single output
- 28mm body with crush proof flange
- Three shaft styles
- Sealed to IP68

### SRH280DP



- Dual output
- Raychem™ DR25 cable
- 28mm body with crush proof flange
- Three shaft styles
- Sealed to IP68

### TPS280DP



- Dual output
- D drive
- Sealed to IP68
- 25mm body with crush proof flange
- Raychem™ DR25 cable+connector

### SRH501P




- Single output
- 87.5mm mounting flange
- Marine grade alloy housing
- Sealed to IP69K

### SRH502P



- Dual output
- 87.5mm mounting flange
- Marine grade alloy housing
- Sealed to IP69K

### SRH880P



- Single output
- 88 mm body
- Aluminum or stainless steel housing
- Sealed to IP68M

# NRH280DP

dual output no contact rotary sensor



## PERFORMANCE

### ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments
<b>Supply voltage</b>	<b>Vdc</b>	9 to 30 (unregulated) and 5 ±0.5 (regulated)
<b>Over voltage protection</b>	<b>Vdc</b>	Up to 40 (-40 to +60°C)
<b>Maximum supply current</b>	<b>mA</b>	<25
<b>Reverse polarity protection</b>		Yes
<b>Short circuit protection</b>		
<b>Output to GND</b>		Yes
<b>Output to supply</b>		In 5V regulated mode only
<b>Power-on settlement time</b>	<b>S</b>	<1
<b>Resolution</b>	<b>%</b>	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	<b>%</b>	<±0.4
<b>Temperature coefficient</b>	<b>ppm/°C</b>	<±30 in 5V supply mode; <±90 in 9-30V supply mode

\*Non-linearity is measured using the least-squares method on a computerised calibration system

### Analog Output (order code A1, A4) – see graph on page 31

<b>Voltage output range</b>		
<b>9-30V supply</b>	<b>Vdc</b>	Absolute voltage, 0.5 to 4.5 (A1) or 0.1 to 4.9 (A4) over measurement range (±3%)
<b>5V supply</b>	<b>Vdc</b>	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
<b>Monotonic range</b>	<b>Vdc</b>	0.25 (5%) and 4.75 (95%) nominal (A1)
	<b>Vdc</b>	0.05 (1%) and 4.95 (99%) nominal (A4)
<b>Load resistance</b>	<b>Ω</b>	10k minimum (resistive to GND)
<b>Output noise</b>	<b>mVrms</b>	<1
<b>Input/output delay</b>	<b>mS</b>	<2

### PWM Output (order code Pn) – see output characteristics on page 31

<b>PWM frequency</b>	<b>Hz</b>	244 (P1); 500 (P2); or 1000 (P3) ±20% over temperature range
<b>PWM levels</b>	<b>Vdc</b>	0 and 5 nominal (±3%)
<b>9-30V supply</b>		
<b>5V supply</b>	<b>Vdc</b>	0 and Vs (±1%)
<b>Duty cycle</b>	<b>%</b>	10 to 90 over measurement range
<b>Monotonic range</b>	<b>%</b>	5 and 95 nominal
<b>Load resistance</b>	<b>Ω</b>	10k minimum (resistive to GND)
<b>Rise/fall time</b>	<b>μS</b>	<15

### MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Maximum rotational speed</b>	°/sec	3600
<b>Weight</b>	<b>g</b>	<55 (with bolt type magnet carrier)
<b>Mounting</b>		Use 2 x M4 socket head cap screws and M4 washer - maximum tightening torque 2Nm. Bolt (B) or plug (P) type magnet holders are available for the customer to assemble to their own equipment. We also offer a magnet only (M) option for OEM's to integrate into their design.
<b>Phasing</b>		When magnet ident mark is facing toward the sensor and cable exit, output is at mid travel. The sensor housing allows for ±10° adjustment via the mounting flange slots.

## ENVIRONMENTAL

<b>Protection class</b>		IP68 (to 2m depth for 2 hours) and IP69K
<b>Life</b>		This product has no contacting parts.
<b>Dither life</b>		Contactless - no degradation due to shaft dither
<b>Operational temperature†</b>	°C	-40 to +140 (5V supply) and +170°C for 72 hours -40 to +135.2 (9V supply option) Derate upper temperature limit by 1.7°C for every 1V increase in supply: e.g. -40 to +100 @30V
<b>Storage temperature</b>	°C	-55 to +140
<b>Vibration</b>		BS EN 60068-2-64:1995 Sec 8.4 (31.4gn rms) 20 to 2000Hz Random
<b>Shock</b>		3m drop onto concrete and 2500g
<b>EMC Immunity level</b>		BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

† See Maximum Operating Temperature – derating graph on page 30.

If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

<b>Measurement range (angle)</b>		Select from 20° to 360° in 1° increments (factory programmed) for each output channel
<b>Output</b>		Analog voltage (An) or PWM (Pn)
<b>Output direction</b>		Both clockwise, both anticlockwise or one CW, one ACW
<b>Magnet holder</b>		Bolt (B) or plug (P) types, or magnet only (M)
<b>Cable length</b>	m	0.5
<b>OEM options</b>		Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; different output phasing CH1/CH2; faster input/output delay; extended analog range; and output mapping for potentiometer replacements.

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory – check with your local supplier for more details


## ORDERING CODES

		<b>NRH280DP/...../...../...../...../...../.....</b>
Measurement range	CH1 = angle in °	_____
Measurement range	CH2 = angle in °	_____
Output	A1 = Analog 0.5-4.5Vdc A4 = Analog 0.1-4.9Vdc P1 = PWM, 244Hz P2 = PWM, 500Hz P3 = PWM, 1000Hz	_____
Direction	3 = Both clockwise 4 = Both anticlockwise 5 = CH1 CW; CH2 ACW	_____
Magnet holder	B = Bolt type P = Plug type M = Magnet only	_____
Cable length	P5 = 0.5m	_____


# NRH280DP

## DIMENSIONS


Note: drawings not to scale

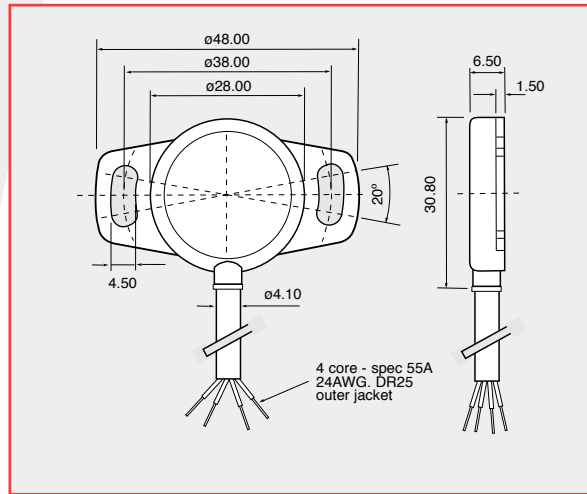


## MAGNET HOLDER OPTIONS

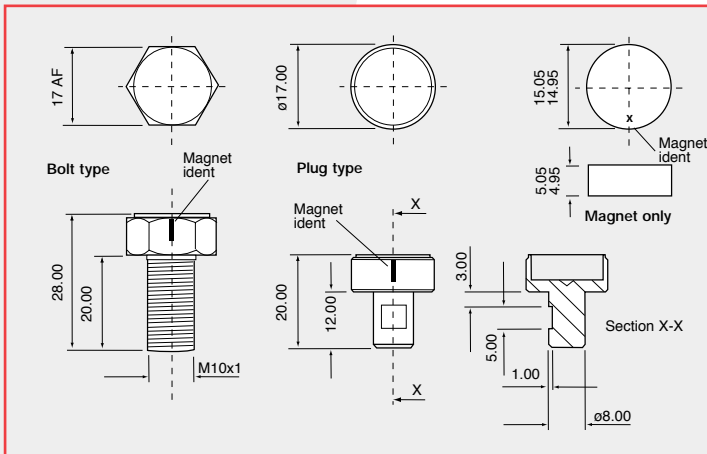

## ELECTRICAL ANGLE

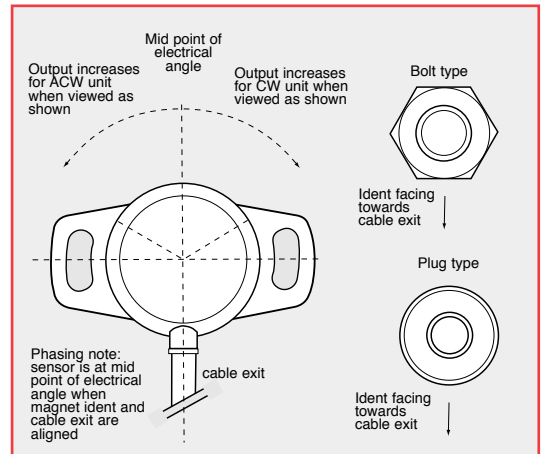

## MAGNET MISALIGNMENT

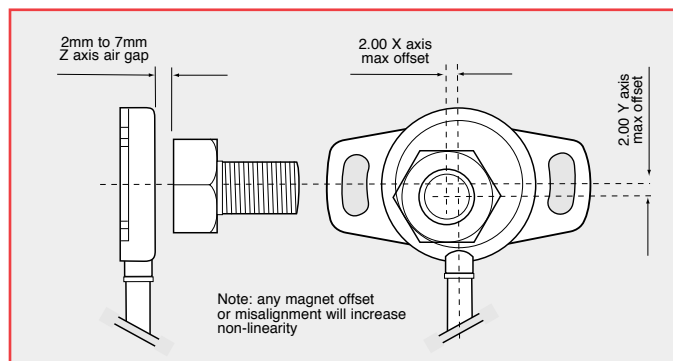

## ELECTRICAL CONNECTIONS

500mm of 4-core cable: FDR-25 sheathed, with 55A spec (24AWG) cores

Cable colour	Description
Red	+V Supply
Yellow	Output 1
White	Output 2
Black	0V Supply (GND)

When connecting the sensor, care should be taken with the correct connections. The sensor is provided with reverse polarity protection and short circuit protection between outputs (Yellow & White) to GND (Black), **but if the outputs (Yellow & White) are connected to the supply this will result in device failure.**

Output increases with CW or ACW rotation viewed on sensor face - depending on selected order code

# NRH285DR DUAL REDUNDANT OUTPUT

no contact rotary sensor – 5Vdc operation only



## PERFORMANCE

### ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments
<b>Supply voltage</b>	<b>Vdc</b>	5 ±0.5 (regulated) to each independent sensor channel
<b>Over voltage protection</b>	<b>Vdc</b>	Up to 10 (-40 to +60°C)
<b>Maximum supply current</b>	<b>mA</b>	<12.5 each independent supply (<25 total)
<b>Reverse polarity protection</b>		Yes
<b>Short circuit protection</b>		
<b>Output to GND</b>		Yes
<b>Output to supply</b>		Yes
<b>Power-on settlement time</b>	<b>S</b>	<1
<b>Resolution</b>	%	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	%	<±0.4
<b>Temperature coefficient</b>	<b>ppm/°C</b>	<±30

\* Non-linearity is measured using the Least-Squares method on a computerised calibration system

### Analog Output (order code A1, A4) – see graph on page 31

<b>Voltage output range</b>	<b>Vdc</b>	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
<b>Monotonic range</b>	<b>Vdc</b>	0.25 (5%) and 4.75 (95%) nominal (A1)
	<b>Vdc</b>	0.05 (1%) and 4.95 (99%) nominal (A4)
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Output noise</b>	<b>mVrms</b>	<1
<b>Input/output delay</b>	<b>mS</b>	<2

### PWM Output (order code Pn) – see output characteristics on page 31

<b>PWM frequency</b>	<b>Hz</b>	244 (P1); 500 (P2); or 1000 (P3) ±20% over temperature range
<b>PWM levels 5V supply</b>	<b>Vdc</b>	0 and Vs (±1%)
<b>Duty cycle</b>	%	10 to 90 over measurement range
<b>Monotonic range</b>	%	5 and 95 nominal
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Rise/fall time</b>	<b>µS</b>	<15

### MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Maximum rotational speed</b>	°/sec	3600
<b>Weight</b>	<b>g</b>	<55 (with bolt type magnet carrier)
<b>Mounting</b>		Use 2 x M4 socket head cap screws and M4 washer - maximum tightening torque 2Nm. Bolt (B) or plug (P) type magnet holders are available for the customer to assemble to their own equipment. We also offer a magnet only (M) option for OEM's to integrate into their design.
<b>Phasing</b>		When magnet ident mark is facing toward the sensor and cable exit, output is at mid travel. The sensor housing allows for ±10° adjustment via the mounting flange slots.



# NRH285DR

## ENVIRONMENTAL

<b>Protection class</b>		IP68 (to 2m depth for 2 hours) and IP69K
<b>Life</b>		This product has no contacting parts.
<b>Dither life</b>		Contactless - no degradation due to shaft dither
<b>Operational temperature*</b>	°C	-40 to +140 and +170°C for 72 hours
<b>Storage temperature</b>	°C	-55 to +140
<b>Vibration</b>		BS EN 60068-2-64:1995 Sec 8.4 (31.4gn rms) 20 to 2000Hz Random
<b>Shock</b>		3m drop onto concrete and 2500g
<b>EMC Immunity level</b>		BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

\* If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

<b>Measurement range (angle)</b>		Select from 20° to 360° in 1° increments (factory programmed) for each output channel
<b>Output</b>		Analog voltage (An) or PWM (Pn)
<b>Output direction</b>		Both clockwise, both anticlockwise or one CW, one ACW
<b>Magnet holder</b>		Bolt (B) or plug (P) types, or magnet only (M)
<b>Cable length</b>	m	0.5
<b>OEM options</b>		Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; different output phasing CH1/CH2; faster input/output delay; extended analog range; and output mapping for potentiometer replacements.

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory – check with your local supplier for more details


## ORDERING CODES

			<b>NRH285DR/...../...../...../...../...../.....</b>
Measurement range	CH1 = angle in °		
Measurement range	CH2 = angle in °		
Output	A1 = Analog 0.5-4.5Vdc A4 = Analog 0.1-4.9Vdc P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz		
Direction	3 = Both clockwise 4 = Both anticlockwise 5 = CH1 CW; CH2 ACW		
Magnet holder	B = Bolt type P = Plug type M = Magnet only		
Cable length	P5 = 0.5m		




## DIMENSIONS


Note: drawings not to scale

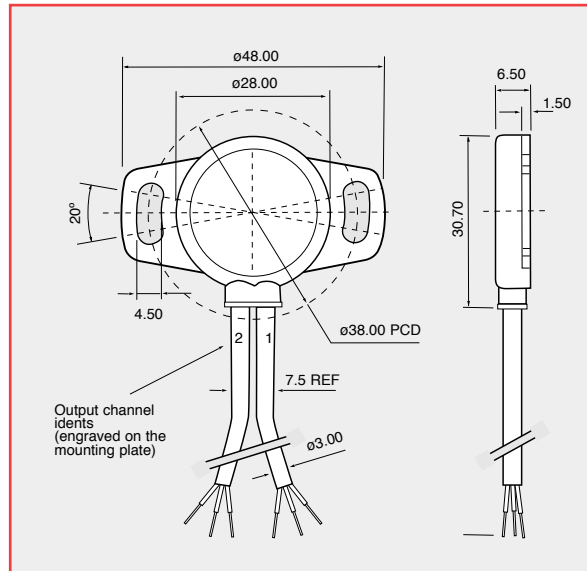


## MAGNET HOLDER OPTIONS

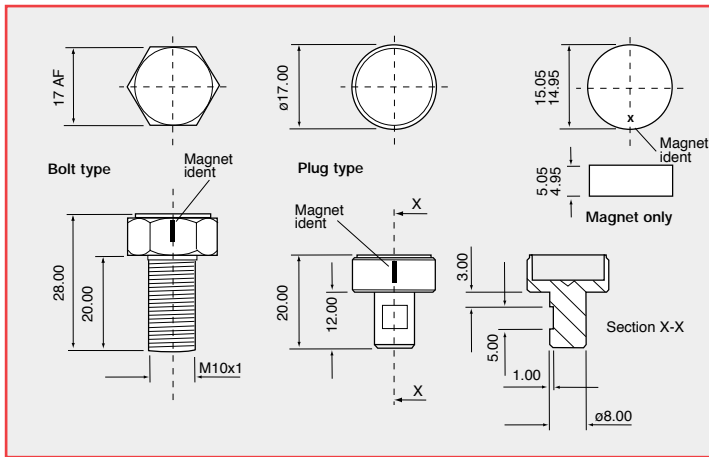

## ELECTRICAL ANGLE

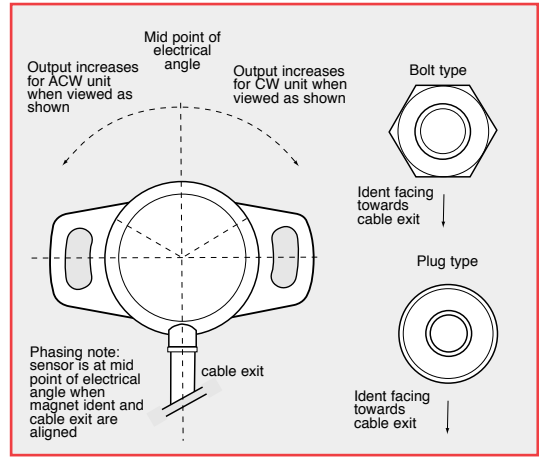

## MAGNET MISALIGNMENT

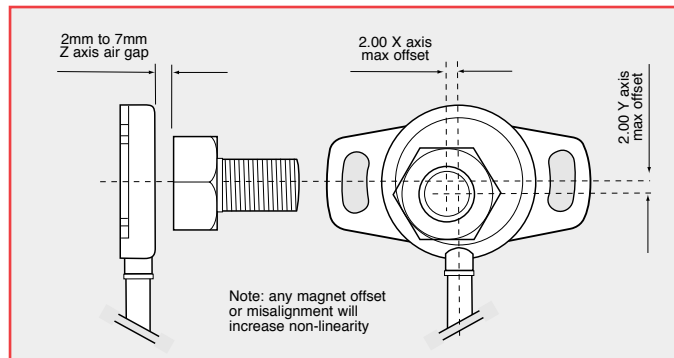

## ELECTRICAL CONNECTIONS

2 x 500mm of 3-core cable: FDR-25 sheathed, with 55A spec (24AWG) cores

Cable colour *	Description
Red	+V Supply
Yellow	Output 1+2
Black	0V Supply (GND)

Output increases with CW or ACW rotation viewed on sensor face - depending on selected order code

\*Cables are identified on the mounting plate. 1 = CH1, 2 = CH2

When connecting the sensor, care should be taken with the correct connections. The sensor is provided with reverse polarity protection and short circuit protection between outputs (Yellow) to GND (Black) and outputs to supply (Red) on NRH 285DR model only.

# SRH220DR DUAL REDUNDANT OUTPUT

contactless rotary sensor



## PERFORMANCE

### Output options

A1 | A4 | P1 | P2 | P3  
0.5-4.5 or 0.1-4.9Vdc | PWM

A2  
0-10Vdc

## ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments	20 to 360 in 1° increments
<b>Supply voltage</b>	Vdc	9 to 30 (unregulated) and 5 ±0.5 (regulated)	13.5 to 30 (unregulated)
<b>Over voltage protection</b>	Vdc	Up to 40 (-40 to +60°C)	Up to 40 (-40 to +60°C)
<b>Maximum supply current</b>	mA	<12.5 each independent supply (<25 total)	<30 (15 each channel)
<b>Reverse polarity protection</b>		Yes	Yes
<b>Short circuit protection</b>			
<b>Output to GND</b>		Yes	Yes
<b>Output to supply</b>		In 5V regulated mode only	Yes
<b>Power-on settlement time</b>	S	<1	<1
<b>Resolution</b>	%	0.025 of measurement range (12 bit)	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	%	<±0.4	<±0.4
<b>Temperature coefficient</b>	ppm/°C	<±30 (5V supply mode) <±110 (9-30V supply mode)	<±125

\*Non-linearity is measured using the least-squares method on a computerised calibration system

## Analog Voltage Output (order code A1, A4) – see graph on page 31

### Voltage output range

<b>9-30V supply</b>	Vdc	Absolute voltage, 0.5 to 4.5 (A1) or 0.1 to 4.9 (A4) over measurement range (±3%)
<b>5V supply</b>	Vdc	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
<b>Monotonic range</b>	Vdc	0.25 (5%) and 4.75 (95%) nominal (A1)
	Vdc	0.05 (1%) and 4.95 (99%) nominal (A4)
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Output noise</b>	mVrms	<1
<b>Input/output delay</b>	mS	<2

## Analog Voltage Output (order code A2) – see typical graph on page 31

<b>Voltage output range</b>	Vdc	Absolute voltage, nominally 0.2 to 9.8 (±0.2V)
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Output noise</b>	mVrms	<1
<b>Input/output delay</b>	mS	3.5

## PWM Output (order code Pn) – see output characteristics on page 31

<b>PWM frequency</b>	Hz	244 (P1); 500 (P2); or 1000 (P3) ±20% over temperature range
<b>PWM levels 9-30V supply</b>	Vdc	0 and 5 nominal (±3%)
<b>5V supply</b>	Vdc	0 and Vs (±1%)
<b>Duty cycle</b>	%	10 to 90 over measurement range
<b>Monotonic range</b>	%	5 and 95 nominal
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Rise/fall time</b>	μS	<15

## MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Operating torque</b>	<b>g-cm</b>	120
<b>Maximum rotational speed</b>	<b>°/sec</b>	3600
<b>Weight</b>	<b>g</b>	<51
<b>Mounting</b>		Use 2 x M4 socket head cap screws and M4 washer - maximum tightening torque 2Nm
<b>Phasing</b>		When shaft drive detail is aligned as shown in Electrical Angle Diagram (page 12) output is at mid travel. The sensor housing allows for ±10° adjustment via the mounting flange slots.

## ENVIRONMENTAL

<b>Protection class</b>		IP68 - with AMP connector option (when recommended mating part is fully connected) IP67 - with Deutsch connector option (when recommended mating part is fully connected)
<b>Life</b>		20 million operations (10 x 10 <sup>6</sup> cycles) of ±75°; sensing element life is essentially infinite (contactless)
<b>Dither life</b>		Contactless - no degradation due to shaft dither
<b>Operational temperature†</b>	<b>°C</b>	
	<b>Output A1, A4, P1-3</b>	-40 to +140 (5V supply) -40 to +135.7 (9V supply) Derate upper temperature limit by 1.7°C for every 1V increase in supply: e.g. -40 to +100 @30V
	<b>Output A2</b>	-40 to +115 (13.5V supply) Derate upper temperature limit by 0.91°C for every 1V increase in supply: e.g. -40 to +100 @30V
<b>Storage temperature</b>	<b>°C</b>	-55 to +140
<b>Vibration</b>		BS EN 60068-2-64:1995 Sec 8.4 (31.4gn rms) 20 to 2000Hz Random
<b>Shock</b>		3m drop onto concrete and 2500g
<b>EMC Immunity level</b>		BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

† See Maximum Operating Temperature – Derating graph on page 30.

If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

<b>Measurement range (angle)</b>	Select from 20° to 360° in 1° increments (factory programmed) for each output channel
<b>Output</b>	Analog voltage (An) or PWM (Pn)
<b>Output direction</b>	Both clockwise, both anticlockwise or one CW, one ACW
<b>Shaft style</b>	D section shaft
<b>Connector</b>	AMP Superseal 1.5 (A) or Deutsch DT04-6P 6-way integrated connectors
<b>Operating lever</b>	An operating lever kit can be supplied separately. See details on page 12
<b>OEM options</b>	Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; different output phasing CH1/CH2; faster input/output delay; extended analog range; and output mapping for potentiometer replacements. We can also supply mating connectors, subject to minimum quantities

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory – check with your local supplier for more details

## ORDERING CODES

		<b>SRH220DR/...../...../...../...../...../.....</b>
Measurement range	CH1 = angle in °	_____
Measurement range	CH2 = angle in °	_____
Output	A1 = Analog 0.5-4.5Vdc A2 = Analog 0-10Vdc A4 = Analog 0.1-4.9Vdc P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz	_____
Direction	3 = Both clockwise 4 = Both anticlockwise 5 = CH1 CW; CH2 ACW 6 = CH1 ACW; CH2 CW	_____
Shaft style	D = D shaft	_____
Connector	A = AMP 1.5 Superseal D = Deutsch DT04-6P	_____

**Accessories** (order separately)

Drive lever kit – SA208983 (includes lever and dowel pin)

**Recommended Mating Connectors (can be supplied for OEM customers)**


AMP Superseal 1.5 Plug – Part 282090-1 (plus 6 x receptacle contacts to match your wire size)

Deutsch DT06 Plug – Part DT06-6S (plus 6 x socket contacts to match your wire size)


# SRH220DR

## DIMENSIONS


Note: drawings not to scale

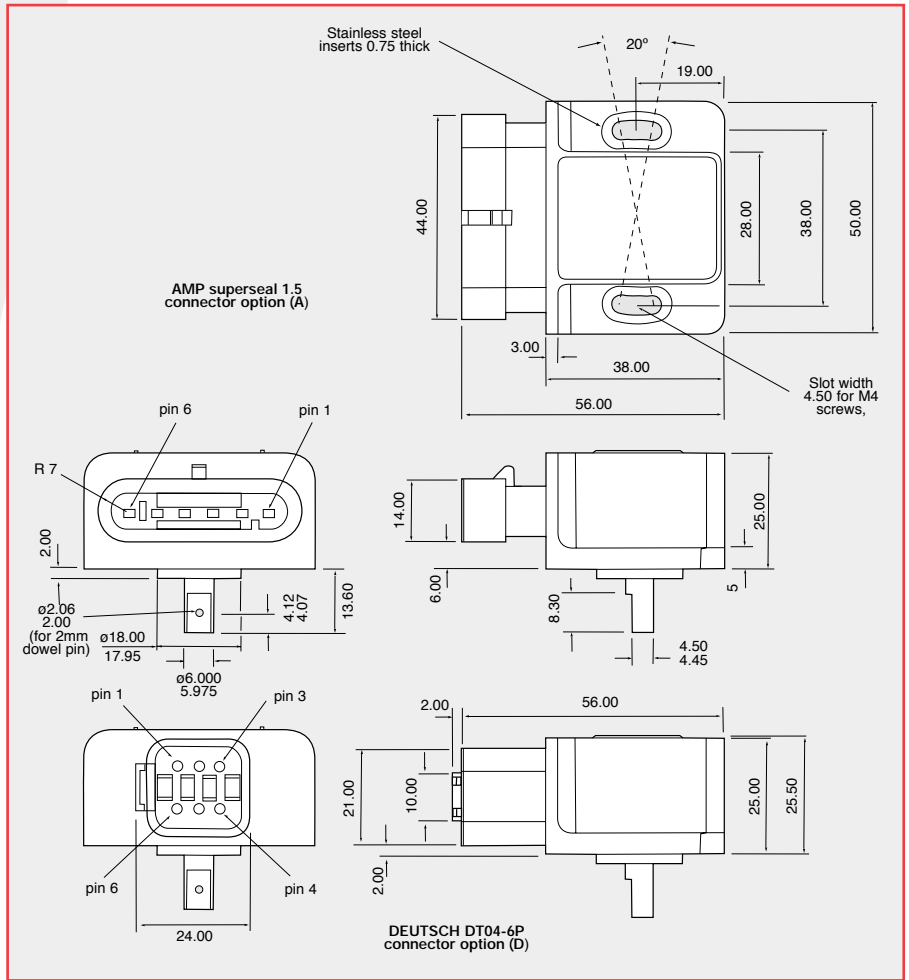

## ELECTRICAL ANGLE

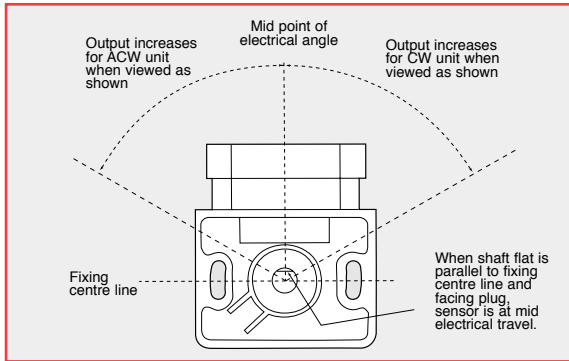


## LEVER OPTION

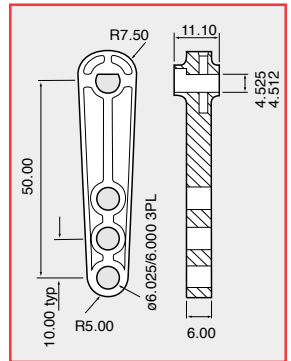

## ELECTRICAL CONNECTIONS

**Option A** - AMP Superseal 1.5 connector  
**Option D** - Deutsch DT04-6P connector

Mating connectors are not supplied

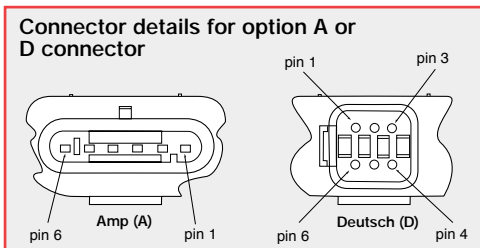


Pin No	Description
1	CH1 - 0V Supply (GND)
2	CH1 - +V supply
3	CH1 - Output
4	CH2 - 0V Supply (GND)
5	CH2 - +V Supply
6	CH2 - Output

When connecting the sensor, care should be taken with the correct connections. The sensor is provided with indefinite reverse polarity protection and short circuit protection between output to GND (Black), **but if the outputs are connected to the supply this will result in device failure.**

Output increases with CW or ACW rotation viewed on shaft - depending on selected order code.

# SRH280P SINGLE OUTPUT

contactless rotary sensor

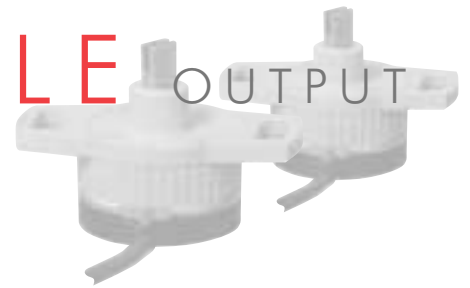

## PERFORMANCE

### ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments
<b>Supply voltage</b>	Vdc	9 to 30 (unregulated) and 5 ±0.5 (regulated)
<b>Over voltage protection</b>	Vdc	Up to 40 (-40 to +60°C)
<b>Maximum supply current</b>	mA	<12.5
<b>Reverse polarity protection</b>		Yes
<b>Short circuit protection</b>		
<b>Output to GND</b>		Yes
<b>Output to supply</b>		In 5V regulated mode only
<b>Power-on settlement time</b>	S	<1
<b>Resolution</b>	%	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	%	<±0.4
<b>Temperature coefficient</b>	ppm/°C	<±50

\*Non-linearity is measured using the least-squares method on a computerised calibration system

### Analog Output (order code A1, A4) – see graph on page 31

<b>Voltage output range</b>		
<b>9-30V supply</b>	Vdc	Absolute voltage, 0.5 to 4.5 (A1) or 0.1 to 4.9 (A4) over measurement range (±3%)
<b>5V supply</b>	Vdc	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
<b>Monotonic range</b>	Vdc	0.25 (5%) and 4.75 (95%) nominal (A1)
	Vdc	0.5 (1%) and 4.95 (99%) nominal (A4)
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Output noise</b>	mVrms	<1
<b>Input/output delay</b>	mS	<2

### PWM Output (order code P) – See output characteristics on page 31

<b>PWM frequency</b>	Hz	244 (P1); 500 (P2); or 1000 (P3) ±20% over temperature range
<b>PWM levels 9-30V supply</b>	Vdc	0 and 5 nominal (±3%)
<b>5V supply</b>	Vdc	0 and Vs (±1%)
<b>Duty cycle</b>	%	10 to 90 over measurement range
<b>Monotonic range</b>	%	5 and 95 nominal
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Rise/fall time</b>	µS	<15

### MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Operating torque - maximum</b>		
<b>sealed shaft IP68</b>	g-cm	120
<b>unsealed shaft IP50</b>	g-cm	100
<b>Shaft velocity maximum</b>	°/sec	3600
<b>Weight</b>	g	<35
<b>Mounting</b>		Use 2 x M4 socket head cap screws and M4 washer - maximum tightening torque 2Nm
<b>Phasing</b>		When shaft flat (or shaft ident mark) is facing toward the cable exit, output is at mid travel. The sensor housing allows for ±10° adjustment via the mounting flange slots.

# SRH280P

## ENVIRONMENTAL

### Protection class

IP68 (to 2m depth for 1 hour) or IP50

### Life

20 million operations ( $10 \times 10^6$  cycles) of  $\pm 75^\circ$

Sensing element life is essentially infinite (contactless); the SRH280P life figure refers to the operating shaft seal. Mechanical load (axial and radial) on the shaft should also be considered.

### Dither life

Contactless - no degradation due to shaft dither

### Operational temperature† °C

-40 to +140 (5V supply)

-40 to +137 (9V supply) Derate upper temperature limit by  $0.57^\circ\text{C}$  for every 1V increase in supply:

e.g. -40 to +125 @30V

### Storage temperature °C

-55 to +140

### Vibration

BS EN 60068-2-64:1995 Sec 8.4 (14gn rms) 20 to 2000Hz Random

### Shock

3m drop onto concrete

### EMC Immunity level

BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

† See Maximum Operating Temperature – Derating graph on page 30

If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

### Measurement range (angle)

Select from  $20^\circ$  to  $360^\circ$  in  $1^\circ$  increments (factory programmed)

### Output

Analog voltage (An) or PWM (Pn)

### Output direction

Clockwise or Anticlockwise shaft rotation with increasing output

### Shaft style

D section, sprung shaft (S) or 2.4mm blade shaft (H)

### Shaft sealing

IP50 or IP68

### Cable length

m 0.2, 0.5 or 2.0

### Custom housing

Synchro mount style with ball race bearings - ask our technical sales team for details

### OEM options

Output can be programmed to provide: non linear law; switch output; clamp voltages; faster input/output delay; extended analog range; and output mapping for potentiometer replacements

## AVAILABILITY


All standard configurations can be supplied rapidly from the factory - check with your local supplier for more details

## ORDERING CODES



		SRH280P/...../...../...../...../...../.....
Measurement range	= angle in °	_____
Output	A1 = Analog 0.5-4.5Vdc A4 = Analog 0.1-4.9Vdc P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz	_____
Direction	1 = Clockwise 2 = Anticlockwise	_____
Shaft style	D = D shaft S = Sprung shaft H = 2.4mm blade shaft	_____
Shaft sealing	50 = IP50 68 = IP68	_____
Cable length	P2 = 0.2m P5 = 0.5m O2 = 2.0m	_____

## DIMENSIONS

Note: drawings not to scale

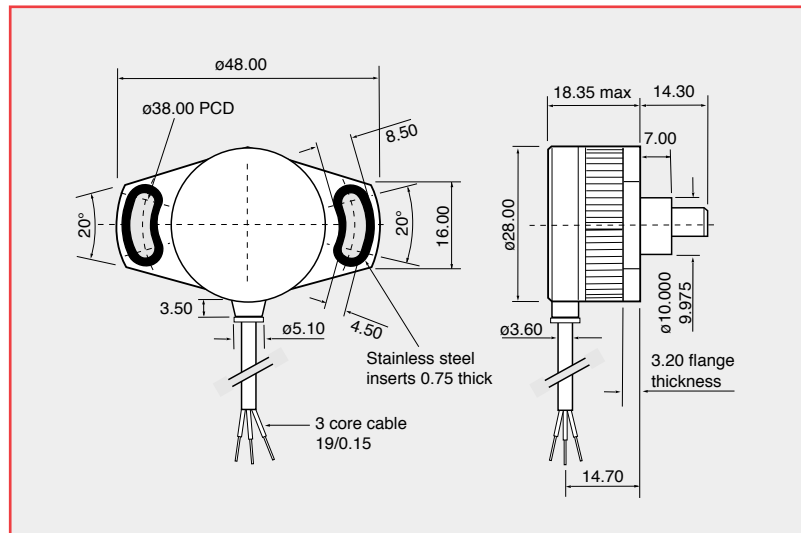

## SHAFT OPTIONS

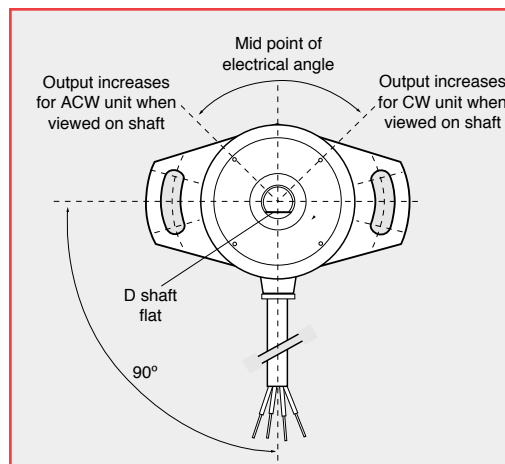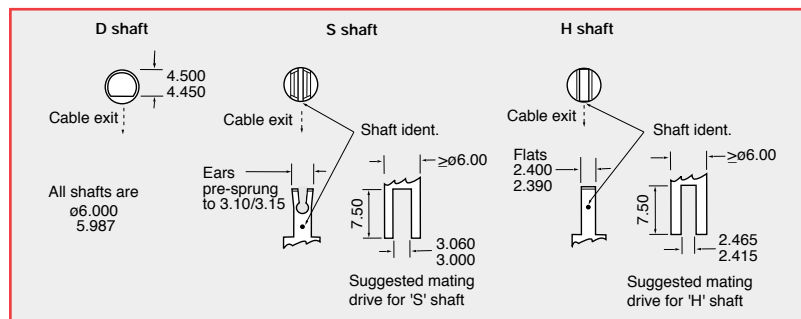

## ELECTRICAL CONNECTIONS

200, 500 or 2000mm of 3-core cable:  
PUR sheathed, with PTFE insulated  
19/0.15 cores

Cable colour	Description
Red	+V Supply
Yellow	Output
Black	0V Supply (GND)


When connecting the sensor, care should be taken with the correct connections. The sensor is provided with reverse polarity protection and short circuit protection between output (Yellow) to GND (Black), **but if the output (Yellow) is connected to the supply it will result in device failure.**

Output increases with CW or ACW rotation viewed on shaft - depending on selected order code



# SRH280DP DUAL OUTPUT

contactless rotary sensor

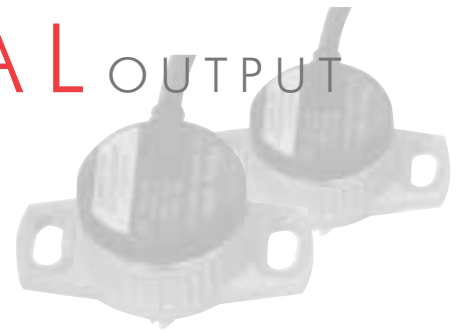

## PERFORMANCE

### ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments
<b>Supply voltage</b>	<b>Vdc</b>	9 to 30 (unregulated) and 5 ±0.5 (regulated)
<b>Over voltage protection</b>	<b>Vdc</b>	Up to 40 (-40 to +60°C)
<b>Maximum supply current</b>	<b>mA</b>	<25
<b>Reverse polarity protection</b>		Yes
<b>Short circuit protection</b>		
<b>Output to GND</b>		Yes
<b>Output to supply</b>		In 5V regulated mode only
<b>Power-on settlement time</b>	<b>S</b>	<1
<b>Resolution</b>	<b>%</b>	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	<b>%</b>	<±0.4
<b>Temperature coefficient</b>	<b>ppm/°C</b>	<±30 in 5V supply mode; <±90 in 9-30V supply mode

\* Non-linearity is measured using the least-squares method on a computerised calibration system

### Analog Output (order code A1, A4) – see graph on page 31

<b>Voltage output range</b>		
<b>9-30V supply</b>	<b>Vdc</b>	Absolute voltage, 0.5 to 4.5 (A1) or 0.1 to 4.9 (A4) over measurement range (±3%)
<b>5V supply</b>	<b>Vdc</b>	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
<b>Monotonic range</b>	<b>Vdc</b>	0.25 (5%) and 4.75 (95%) nominal (A1)
	<b>Vdc</b>	0.05 (1%) and 4.95 (99%) nominal (A4)
<b>Load resistance</b>	<b>Ω</b>	10k minimum (resistive to GND)
<b>Output noise</b>	<b>mVrms</b>	<1
<b>Input/output delay</b>	<b>mS</b>	<2

### PWM Output (order code Pn) – see output characteristics on page 31

<b>PWM frequency</b>	<b>Hz</b>	244 (P1); 500 (P2); or 1000 (P3) ±20% over temperature range
<b>PWM levels 9-30V supply</b>	<b>Vdc</b>	0 and 5 nominal (±3%)
<b>5V supply</b>	<b>Vdc</b>	0 and Vs (±1%)
<b>Duty cycle</b>	<b>%</b>	10 to 90 over measurement range
<b>Monotonic range</b>	<b>%</b>	5 and 95 nominal
<b>Load resistance</b>	<b>Ω</b>	10k minimum (resistive to GND)
<b>Rise/fall time</b>	<b>μS</b>	<15

### MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Operating torque - maximum</b>		
<b>sealed shaft IP68</b>	<b>g-cm</b>	120
<b>unsealed shaft IP50</b>	<b>g-cm</b>	100
<b>Shaft velocity maximum</b>	<b>°/sec</b>	3600
<b>Weight</b>	<b>g</b>	<35
<b>Mounting</b>		Use 2 x M4 socket head cap screws and M4 washer - maximum tightening torque 2Nm
<b>Phasing</b>		When shaft flat (or shaft ident mark) is facing toward the cable exit, output is at mid travel. The sensor housing allows for ±10° adjustment via the mounting flange slots.

## ENVIRONMENTAL

<b>Protection class</b>		IP68 (to 2m depth for 1 hour) or IP50
<b>Life</b>		20 million operations (10 x 10 <sup>6</sup> cycles) of ±75° Sensing element life is essentially infinite (contactless); the SRH280DP life figure refers to the operating shaft seal. Mechanical load (axial and radial) on the shaft should also be considered.
<b>Dither life</b>		Contactless - no degradation due to shaft dither
<b>Operational temperature<sup>†</sup></b>	°C	-40 to +140 (5V supply) -40 to +135.7 (9V supply) Derate upper temperature limit by 1.7°C for every 1V increase in supply: e.g. -40 to +100 @30V
<b>Storage temperature</b>	°C	-55 to +140
<b>Vibration</b>		BS EN 60068-2-64:1995 Sec 8.4 (31.4gn rms) 20 to 2000Hz Random
<b>Shock</b>		3m drop onto concrete
<b>EMC Immunity level</b>		BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

<sup>†</sup> See Maximum Operating Temperature – derating graph on page 30.

If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

<b>Measurement range (angle)</b>		Select from 20° to 360° in 1° increments (factory programmed) for each output channel
<b>Output</b>		Analog voltage (An) or PWM (Pn)
<b>Output direction</b>		Both clockwise, both anticlockwise or one CW, one ACW
<b>Shaft style</b>		D section, sprung shaft (S) or 2.4mm blade shaft (H)
<b>Shaft sealing</b>		IP50 or IP68
<b>Cable length</b>	m	0.2 or 0.5
<b>Custom housing</b>		Synchro mount style with ball race bearings - ask our technical sales team for details
<b>OEM options</b>		Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; different output phasing CH1/CH2; faster input/output delay; extended analog range; and output mapping for potentiometer replacements

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory - check with your local supplier for more details


## ORDERING CODES

		<b>SRH280DP/...../...../...../...../...../...../.....</b>
Measurement range	CH1 = angle in °	_____
Measurement range	CH2 = angle in °	_____
Output	A1 = Analog 0.5-4.5Vdc A4 = Analog 0.1-4.9Vdc P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz	_____
Direction	3 = Both clockwise 4 = Both anticlockwise 5 = CH1 CW; CH2 ACW	_____
Shaft style	D = D shaft S = Sprung shaft H = 2.4mm blade shaft	_____
Shaft sealing	50 = IP50 68 = IP68	_____
Cable length	P2 = 0.2m P5 = 0.5m	_____



# SRH280DP

## DIMENSIONS

Note: drawings not to scale

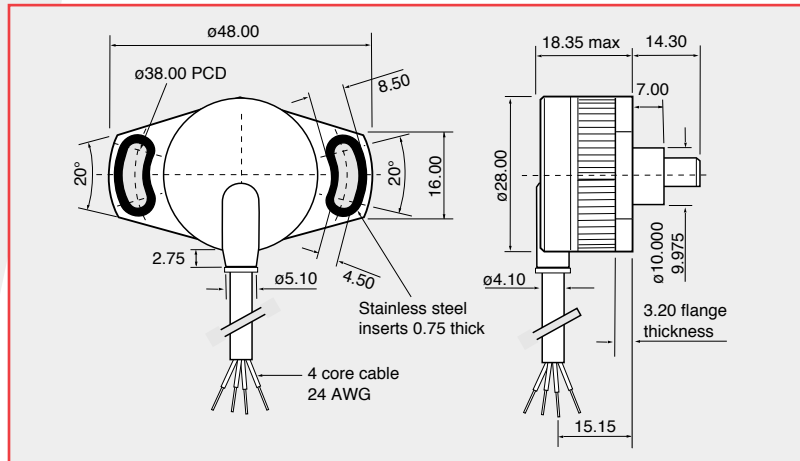

## SHAFT OPTIONS

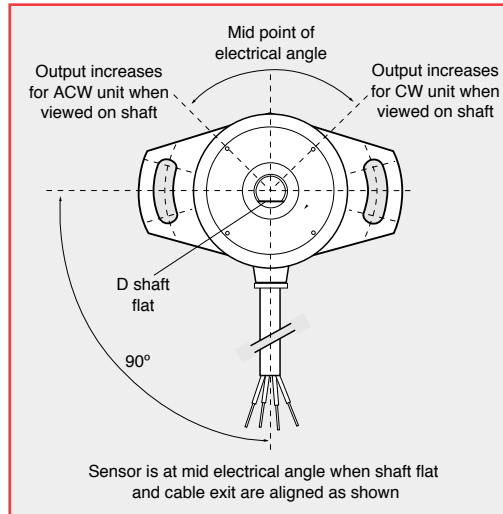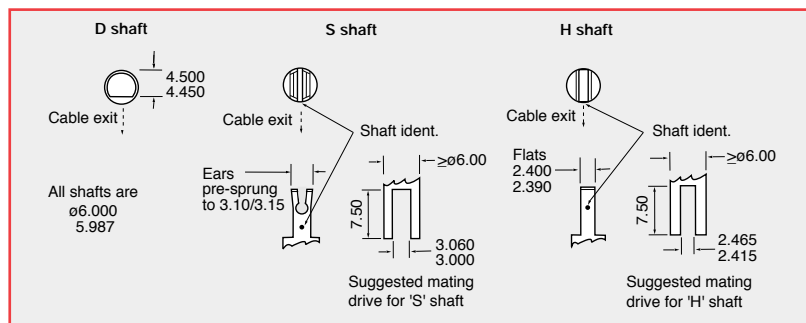

## ELECTRICAL CONNECTIONS

200 or 500mm of 4-core cable: FDR-25 sheathed, with 55A spec (24AWG) cores

Cable colour	Description
Red	+V Supply
Yellow	Output 1
White	Output 2
Black	0V Supply (GND)

When connecting the sensor, care should be taken with the correct connections. The sensor is provided with reverse polarity protection and short circuit protection between outputs (Yellow & White) to GND (Black), **but if the outputs (Yellow & White) are connected to the supply this will result in device failure.**

Output increases with CW or ACW rotation viewed on shaft - depending on selected order code.

# TPS280DP DUAL OUTPUT

contactless throttle position/rotary sensor



## PERFORMANCE

### ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments
<b>Supply voltage</b>	Vdc	9 to 30 (unregulated) and 5 ±0.5 (regulated)
<b>Over voltage protection</b>	Vdc	Up to 40 (-40 to +60°C)
<b>Maximum supply current</b>	mA	<25
<b>Reverse polarity protection</b>		Yes
<b>Short circuit protection</b>		
<b>Output to GND</b>		Yes
<b>Output to supply</b>		In 5V regulated mode only
<b>Power-on settlement time</b>	S	<1
<b>Resolution</b>	%	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	%	<±0.4
<b>Temperature coefficient</b>	ppm/°C	<±30 in 5V supply mode; <±90 in 9-30V supply mode

\*Non-linearity is measured using the Least-Squares method on a computerised calibration system

### Analog Output (order code A1, A4) – see graph on page 31

<b>Voltage output range</b>		
<b>9-30V supply</b>	Vdc	Absolute voltage, 0.5 to 4.5 (A1) or 0.1 to 4.9 (A4) over measurement range (±3%)
<b>5V supply</b>	Vdc	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
<b>Monotonic range</b>	Vdc	0.25 (5%) and 4.75 (95%) nominal (A1)
	Vdc	0.05 (1%) and 4.95 (99%) nominal (A4)
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Output noise</b>	mVrms	<1
<b>Input/output delay</b>	mS	<2

### PWM Output (order code Pn) – see output characteristics on page 31

<b>PWM frequency</b>	Hz	244 (P1); 500 (P2); or 1000 (P3) ±20% over temperature range
<b>PWM levels</b>	9-30V supply Vdc	0 and 5 nominal (±3%)
	5V supply Vdc	0 and Vs (±1%)
<b>Duty cycle</b>	%	10 to 90 over measurement range
<b>Monotonic range</b>	%	5 and 95 nominal
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Rise/fall time</b>	µS	<15

### MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Operating torque</b>	g-cm	10
<b>Maximum rotational speed</b>	°/sec	3600
<b>Weight</b>	g	<30
<b>Mounting</b>		Use 2 x M4 socket head cap screws and M4 washer - maximum tightening torque 2Nm
<b>Phasing</b>		When shaft drive detail is aligned as shown in Electrical Angle Diagram (page 21), output is at mid travel. The sensor housing allows for ±10° adjustment via the mounting flange slots.

# TPS280DP

## ENVIRONMENTAL

<b>Protection class</b>		IP68 (to 2m depth for 1 hour) and IP69K
<b>Life</b>		60 million operations (30 x 10 <sup>6</sup> cycles) of ±75°; Sensing element life is essentially infinite (contactless)
<b>Dither life</b>		Contactless - no degradation due to shaft dither
<b>Operational temperature†</b>	°C	-40 to +140 (5V supply) and +170°C for 72 hours -40 to +135.7 (9V supply option) Derate upper temperature limit by 1.7°C for every 1V increase in supply: e.g. -40 to +100 @30V
<b>Storage temperature</b>	°C	-55 to +140
<b>Vibration</b>		BS EN 60068-2-64:1995 Sec 8.4 (31.4gn rms) 20 to 2000Hz Random
<b>Shock</b>		3m drop onto concrete and 2500g
<b>EMC Immunity level</b>		BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

† See Maximum Operating Temperature – Derating graph on page 30.  
If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

<b>Measurement range (angle)</b>		Select from 20° to 360° in 1° increments (factory programmed) for each output channel
<b>Output</b>		Analog voltage (An) or PWM (Pn)
<b>Output direction</b>		Both clockwise, both anticlockwise or one CW, one ACW
<b>Cable length</b>	m	0.2 or 0.5
<b>Connector</b>		Not fitted (C0) or Mini Sure Seal MSS4R fitted (C1)
<b>OEM options</b>		Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; different output phasing CH1/CH2; faster input/output delay; extended analog range; and output mapping for potentiometer replacements.

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory – check with your local supplier for more details


## ORDERING CODES

		<b>TPS280DP/...../...../...../...../...../.....</b>
Measurement range	CH1 = angle in °	
Measurement range	CH2 = angle in °	
Output	A1 = Analog 0.5-4.5Vdc A4 = Analog 0.1-4.9Vdc P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz	
Direction	3 = Both clockwise 4 = Both anticlockwise 5 = CH1 CW; CH2 ACW	
Cable length	P2 = 0.2m P5 = 0.5m	
Connector	C0 = No connector C1 = Mini Sure Seal MSS4R	


**Accessories** (order all items separately)  
Mating connector – X61-227-002 Mini Sure Seal MSS4P  
X61-227-201 PIN contact (2off required)  
X61-227-202 SOCKET contact (2off required)

## DIMENSIONS


Note: drawings not to scale

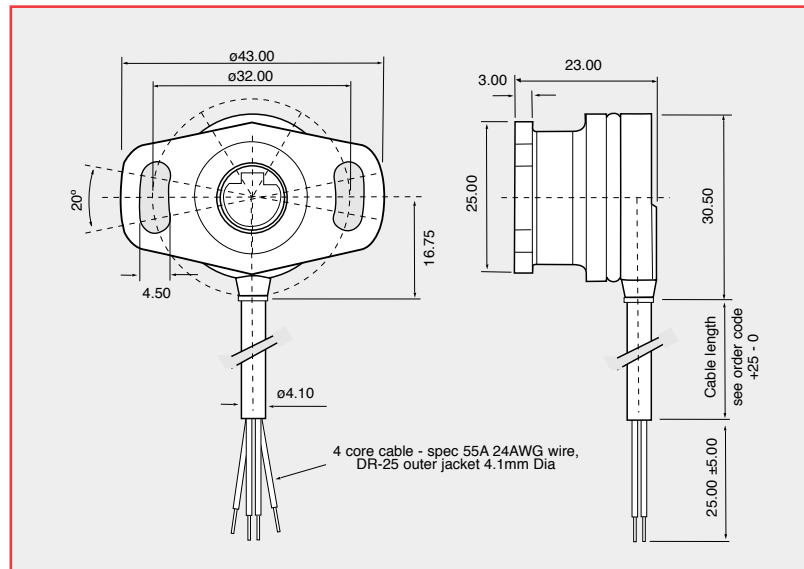

## ELECTRICAL ANGLE

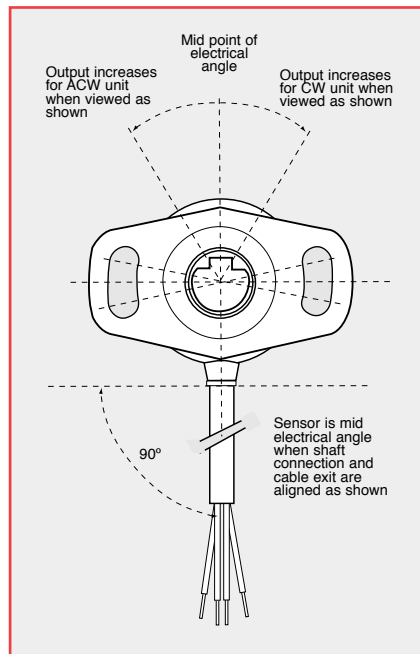

## RECOMMENDED MATING DRIVE

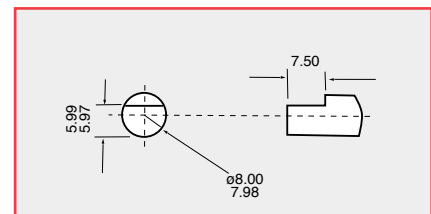

## ELECTRICAL CONNECTIONS

**Option C0** - 200 or 500mm of 4-core cable: FDR-25 sheathed, with 55A spec (24AWG) cores


**Option C1** - Mini sure seal MSS4R fitted to cable

Cable colour	Description
Red	+V Supply
Black	0V Supply GND
Yellow	CH1 Output
White	CH2 Output

Output increases with CW or ACW rotation viewed on shaft drive - depending on selected order code

### C1 Connector option


Pin 1 = V+ Supply      Pin 3 = CH1 Output  
Pin 2 = 0V Supply GND      Pin 4 = CH2 Output



When connecting the sensor, care should be taken with the correct connections. The sensor is provided with reverse polarity protection and short circuit protection between outputs (Yellow & White) to GND (Black), **but if the outputs (Yellow & White) are connected to the supply this will result in device failure.**

# SRH 501P SINGLE OUTPUT AND SRH 502P DUAL OUTPUT

rugged contactless rotary sensors

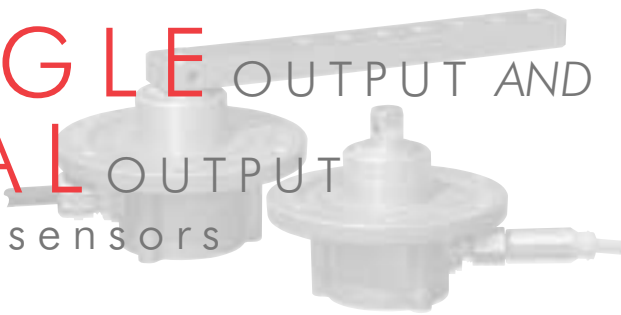

## PERFORMANCE

Output options	A1   A4   P1   P2   P3	A2	A3
	0.5-4.5 or 0.1-4.9Vdc   PWM	0-10Vdc	4-20mA
<b>ELECTRICAL</b>			
Measurement range	°	20 to 360 in 1° increments	20 to 360 in 1° increments
Supply voltage			
unregulated	Vdc	9 to 30	13.5 to 30
regulated	Vdc	5 ±0.5	9 to 30
Over voltage protection	Vdc	No	No
Maximum supply current	mA	Up to 40 (-40 to +60°C)	Up to 40 (-40 to +60°C)
Reverse polarity protection		<25	<30
Short circuit protection		Yes	Yes
Output to GND		Yes	Yes
Output to supply		In 5V regulated mode only	Yes
Power-on settlement time	S	<1	<1
Resolution	%	<±0.4	<±0.4
Non-linearity*	%	<±0.4	<±0.4
Temperature coefficient	ppm/°C	<±30 in 5V supply mode <±90 in 9-30V supply mode	<±50 N/A
			<±25+total output current <±200 typical <±200 maximum**

\*Non-linearity is measured using the Least-Squares method on a computerised calibration system

\*\*Temperature compensation possible by using graph shown on page 30

## Analog Voltage Output - (order code A1, A4) see typical graph on page 31

Voltage output range		
9-30V supply	Vdc	Absolute voltage, 0.5 to 4.5 (A1) or 0.1 to 4.9 (A4) over measurement range (±3%)
5V supply	Vdc	Ratiometric output voltage - 10 to 90% (A1) or 2 to 98% (A4) of Vs over measurement range (±1%)
Monotonic range	Vdc	0.25 (5%) and 4.75 (95%) nominal (A1)
	Vdc	0.05 (1%) and 4.95 (99%) nominal (A4)
Load resistance	Ω	10k minimum (resistive to GND)
Output noise	mVrms	<1
Input/output delay	mS	<2

## Analog Voltage Output - (order code A2) see typical graph on page 31

Voltage output range	Vdc	Absolute voltage, nominally 0.2 to 9.8 (±0.2V)
Load resistance	Ω	10k minimum (resistive to GND)
Output noise	mVrms	<1
Input/output delay	mS	3.5

## Analog Current Output - (order code A3) see typical graph on page 31

Current output range	mA	Absolute current, nominally 4 to 20 (±2% span)
Load resistance	Ω	400 maximum (resistive to GND)
Output noise	μArms	<10
Input/output delay	mS	3.75



## PWM Output options (order code Pn) see output characteristics on page 31

<b>PWM frequency</b>	<b>Hz</b>	244 (P1); 500 (P2); or 1000 (P3) $\pm 20\%$ over temperature range
<b>PWM levels</b>	<b>9-30V supply Vdc</b>	0 and 5 nominal ( $\pm 3\%$ )
	<b>5V supply Vdc</b>	0 and $V_s$ ( $\pm 1\%$ )
<b>Duty cycle</b>	<b>%</b>	10 to 90 over measurement range
<b>Monotonic range</b>	<b>%</b>	5 and 95 nominal
<b>Load resistance</b>	<b><math>\Omega</math></b>	10k minimum (resistive to GND)
<b>Rise/fall time</b>	<b><math>\mu S</math></b>	<20

## MECHANICAL

<b>Mechanical angle</b>	<b>°</b>	360, continuous
<b>Operating torque - max</b>	<b>g-cm</b>	1000
<b>Shaft velocity maximum</b>	<b>°/sec</b>	3600
<b>Weight</b>	<b>g</b>	265 (without cable)
<b>Mounting</b>		Use 3 x M6 threaded holes in front face or 3 x M6 (or 1/4 UNC) clearance holes through the flange – See dimensions for details
<b>Phasing</b>		When the shaft flat is facing towards the cable exit, sensor output is at mid electrical angle ( $\pm 5^\circ$ )

## ENVIRONMENTAL

<b>Protection class</b>		IP69K with cable codes Bxx and Sxx IP68 or IP69K with cable code C01 when mating connectors (see page 26) are attached and fully engaged)
<b>Life</b>		20 million operations ( $10 \times 10^6$ cycles) of $\pm 75^\circ$ Sensing element life is essentially infinite (contactless), and the SRH501P/502P life figures refer to the operating shaft seal. Mechanical load (axial and radial) on the shaft should also be considered.
<b>Dither life</b>		Contactless - no degradation due to shaft dither
<b>Shaft side load</b>		2Kg mounted on sensor shaft - tested 3 million cycles
<b>Operational temperature†</b>	<b>°C</b>	
	<b>Output A1, A4, P1-3</b>	-40 to +140 (5V supply) -40 to +135.7 (9V supply) Derate upper temperature limit by $1.7^\circ C$ for every 1V increase in supply: e.g. -40 to +100 @30V
	<b>Output A2</b>	-40 to +115 (13.5V supply) Derate upper temperature limit by $0.91^\circ C$ for every 1V increase in supply: e.g. -40 to +100 @30V
	<b>Output A3</b>	-40 to +120 (9V supply) Derate upper temperature limit by $1.05^\circ C$ for every 1V increase in supply: e.g. -40 to +98 @30V
<b>Storage temperature</b>	<b>°C</b>	-55 to +140
<b>Vibration</b>		BS EN 60068-2-64:1995 Sec 8.4 (14gn rms) 20 to 2000Hz Random
<b>Shock</b>		3m drop onto concrete and 2500g – all axes
<b>EMC Immunity level</b>		BS EN 61000-4-3:1999, to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (35V/m 1.4GHz to 2.7GHz for output A3) (2004/108/EC)
<b>Salt spray</b>		BS EN 60068-2-52: 1996, Test Kb Severity 2 (48hr)
<b>Humidity</b>		BS EN 60068-2-30: 2005, Severity Db ( $55^\circ C$ , 93%RH)

† See Maximum Operating Temperature – Derating graphs on page 30.

If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

<b>Measurement range (angle)</b>		Select from $20^\circ$ to $360^\circ$ in $1^\circ$ increments (factory programmed) for each output channel
<b>Output</b>		Analog voltage (A1, A2, A4) Analog current (A3) PWM (Pn)
	<i>coming soon in 2012</i>	CANbus outputs: J1939 (J1); CANopen (O1)
<b>Output direction</b>		Both clockwise, both anticlockwise or one CW, one ACW
<b>Electrical connections</b>		No cable (A00, S00), 1m, 5m, 10m unshielded (Bxx) or shielded (Sxx) cable or M12 receptacle (C01)
<b>Cabled sockets</b>		1.5, 2, 5 & 10m mating cabled sockets can be ordered separately. See details on page 26
<b>Operating levers</b>		Operating levers 155 or 230mm long can be ordered separately. See details on page 25
<b>OEM options</b>		Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; different output phasing CH1/CH2; faster input/output delay; extended analog range; and output mapping for potentiometer replacements.

# SRH501P AND SRH502P

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory – check with your local supplier for more details

## ORDERING CODES

NOTE: When selecting output option A3 (4-20mA), cable codes Sxx are the only cable codes allowable.

### SINGLE OUTPUT SRH501P

		SRH501P/...../...../...../.....
Measurement range	= angle in °	.....
Output	A1 = Analog 0.5-4.5Vdc A2 = Analog 0-10Vdc A3 = Analog 4-20mA A4 = Analog 0.1-4.9Vdc P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz	.....
Direction	1 = Clockwise 2 = Anticlockwise	.....
Cable code	A00 = No cable, gland fitting S00 = No cable, screened cable gland (A3 output option – see note)  B01 = 1m 3-core unscreened cable, IP69K B05 = 5m 3-core unscreened cable, IP69K B10 = 10m 3-core unscreened cable, IP69K  S01 = 1m 3-core screened cable, IP69K (A3 output options – see note) S05 = 5m 3-core screened cable, IP69K S10 = 10m 3-core screened cable, IP69K  C01 = M12 screw locking receptacle	.....

### DUAL OUTPUT SRH502P

		SRH502P/...../...../...../...../.....
Measurement range	CH1 = angle in °	.....
Measurement range	CH2 = angle in °	.....
Output	A1 = Analog 0.5-4.5Vdc A2 = Analog 0-10Vdc A3 = Analog 4-20mA A4 = Analog 0.1-4.9Vdc  P1 = PWM, 244 Hz P2 = PWM, 500 Hz P3 = PWM, 1000 Hz	.....
Direction	3 = Both clockwise 4 = Both anticlockwise 5 = CH1 CW; CH2 ACW	.....
Cable code	A00 = No cable, gland fitting S00 = No cable, screened cable gland (A3 output option – see note)  B01 = 1m 4-core unscreened cable, IP69K B05 = 5m 4-core unscreened cable, IP69K B10 = 10m 4-core unscreened cable, IP69K  S01 = 1m 4-core screened cable, IP69K (A3 output options – see note) S05 = 5m 4-core screened cable, IP69K S10 = 10m 4-core screened cable, IP69K  C01 = M12 screw locking receptacle	.....


#### Accessories (order separately)

Drive lever kit – SA202195/MK - see page 25


Mating connectors - see details on page 26

## DIMENSIONS


Note: drawings not to scale

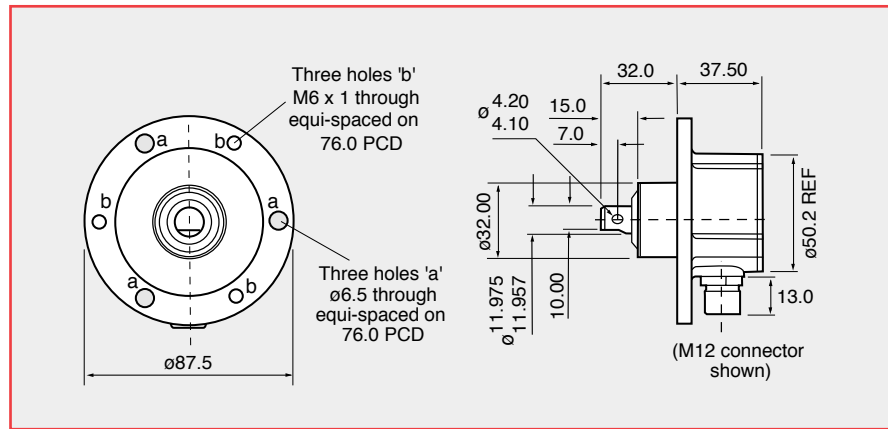

## PHASING OF SHAFT TO HOUSING

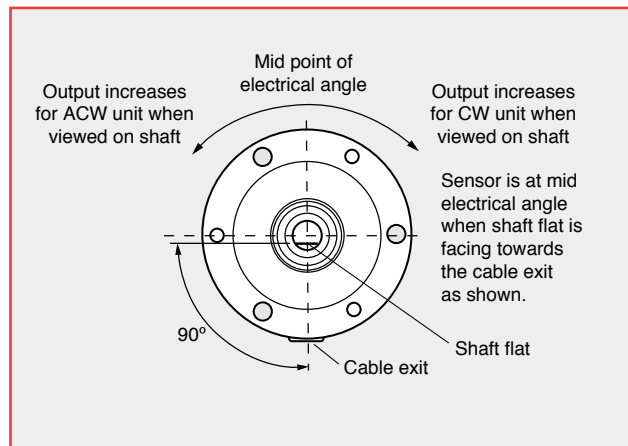

## LEVER OPTIONS (order separately)

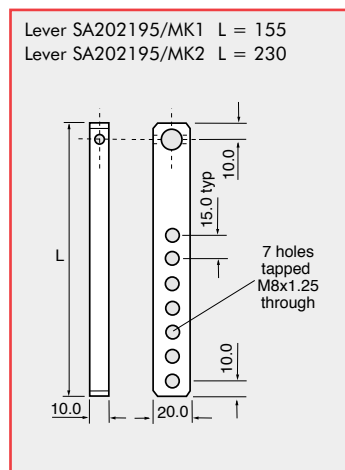


# SRH501P AND SRH502P

## ELECTRICAL CONNECTIONS

- Option A00** – No cable supplied
- Option S00** – No cable supplied (Fitted gland to suit screened cable)
- Option Bxx** – Cable supplied (1m, 5m or 10m)
- Option Sxx** – Screened cable supplied (1m, 5m or 10m)
- Option C01** – Series M12 screw locking receptacle to IEC 61076-2-101 (Ed.1) /IEC 60947-5-2 fitted to sensor body. Mating cabled sockets to be ordered separately.


## CONNECTING CABLE OPTIONS

### Connection details for no cable option A00 S00




Cable gland for cable between  $\varnothing 4-8\text{mm}$   
 Connection capacity - AWG 26-16 or 0.14-1.5mm<sup>2</sup>

### Connection details for cable option Bxx and Sxx

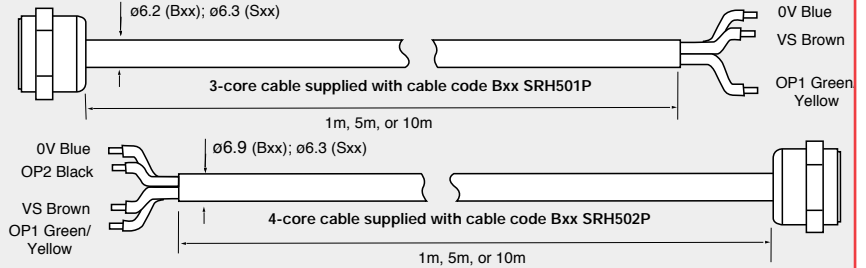

Note: Sxx option includes a cable screen required for output option A3

### Connection details for option C01 - M12 connector (not available for output A3)




Pin No.	Cable colour	Description
1	Brown	+V Supply
2	White	Output 2 (not used on SRH501P)
3	Blue	0V Supply (GND)
4	Black	Output 1

Output increases with CW or ACW rotation viewed on shaft - depending on selected order code

### M12 mating connectors for cable option C01 (order separately)

#### Connector IP68

- 2 metre X61-220-101
- 5 metre X61-220-102
- 10 metre X61-220-103



#### Steel connector IP69K


- 1.5 metre X61-222-001
- 5 metre X61-222-003
- 10 metre X61-222-005

When connecting the sensor, care should be taken with the correct connections.

The sensor is provided with indefinite reverse polarity protection and short circuit protection between output to GND, **but if the outputs are connected to the supply this will result in device failure.**

# SRH880P SINGLE OUTPUT

rugged contactless rotary sensor



## PERFORMANCE

### ELECTRICAL

<b>Measurement range</b>	°	20 to 360 in 1° increments
<b>Supply voltage</b>	Vdc	9 to 30 (unregulated) and 5 ±0.5 (regulated)
<b>Over voltage protection</b>	Vdc	Up to 40 (-40 to +60°C)
<b>Maximum supply current</b>	mA	<12.5
<b>Reverse polarity protection</b>		Yes
<b>Short circuit protection</b>		
<b>output to GND</b>		Yes
<b>output to supply</b>		In 5V regulated mode only
<b>Power-on settlement time</b>	S	<1
<b>Resolution</b>	%	0.025 of measurement range (12 bit)
<b>Non-linearity*</b>	%	<±0.4
<b>Temperature coefficient</b>	ppm/°C	<±50

\*Non-linearity is measured using the Least-Squares method on a computerised calibration system

### Analog Output (order code A) – see graph on page 31

<b>Voltage output range</b>		
<b>9-30V supply</b>	Vdc	Absolute voltage, 0.5 to 4.5 over measurement range (±3%)
<b>5V supply</b>	Vdc	Ratiometric output voltage - 10 to 90% of Vs over measurement range(±1%)
<b>Monotonic range</b>	Vdc	0.25 (5%) and 4.75 (95%) nominal
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Output noise</b>	mVrms	<1
<b>Input/output delay</b>	mS	<2

### PWM Output (order code P) – See output characteristics on page 31

<b>PWM frequency</b>	Hz	244 ±20% over temperature range
<b>PWM levels 9-30V supply</b>	Vdc	0 and 5 nominal (±3%)
<b>5V supply</b>	Vdc	0 and Vs (±1%)
<b>Duty cycle</b>	%	10 to 90 over measurement range
<b>Monotonic range</b>	%	5 and 95 nominal
<b>Load resistance</b>	Ω	10k minimum (resistive to GND)
<b>Rise/fall time</b>	µS	<20

### MECHANICAL

<b>Mechanical angle</b>	°	360, continuous
<b>Operating torque - max</b>	g-cm	1000
<b>Shaft velocity max</b>	°/sec	3600
<b>Weight</b>	g	500
<b>Mounting</b>		Use 3 x M6 threaded holes in front face or 3 x M6 clearance holes through the body - see dimensions for details
<b>Phasing</b>		When the shaft flat is facing the scribed mark on the front face (as shown in the diagram), sensor output is at mid travel (±5°)

# SRH880P

## ENVIRONMENTAL

### Protection class

IP68

### Life

20 million operations (10 x 10<sup>6</sup> cycles) of  $\pm 75^\circ$

Sensing element life is essentially infinite (contactless), but the SRH880P life figures refer to the shaft seal. Mechanical load (axial and radial) on the shaft should also be considered.

### Dither life

Contactless - no degradation due to shaft dither

### Operational temperature† °C

-40 to +120 (5V and 9V supply)

-40 to +90 (30V supply)

### Storage temperature °C

-55 to +125

### Vibration

10 to 2000Hz Random – 12.6gn rms – all axes

### Shock

Survival to 2500g – all axes

### EMC Immunity level

BS EN 61000-4-3:1999 to 100V/m, 80MHz to 1GHz and 1.4GHz to 2.7GHz (2004/108/EC)

† If the maximum operating temperature is exceeded, the voltage regulator will shut down to protect the device from overheating

## OPTIONS

### Measurement range (angle)

Select from 20° to 360° in 1° increments (factory programmed) for each output channel

### Output

Analog voltage (A) or PWM (Pn)

### Output direction

Clockwise or Anticlockwise shaft rotation with increasing output

### Cabled socket

2m or 5m cabled socket assemblies available

### Body material

Optional anodised aluminium or corrosion resistant stainless steel housing

### Operating levers

Operating levers 155 or 230mm long should be ordered separately. See details page 25

### OEM options

Outputs can be programmed to provide: non linear laws; switch outputs; clamp voltages; alternative PWM frequencies; faster input/output delay; extended analog range; and output mapping for potentiometer replacements.

## AVAILABILITY

All standard configurations can be supplied rapidly from the factory - check with your local supplier for more details

## ORDERING CODES

		SRH880P/...../...../...../...../.....
Measuring range	= angle in °	_____
Output	A = Analog P = PWM	_____
Direction	1 = Clockwise 2 = Anticlockwise	_____
Cabled socket	00 = None 02 = 2m 05 = 5m	_____
Body material	AL = Aluminium SS = Stainless steel	_____

### Accessories (order separately)


Drive lever kit – SA202195/MK - see page 25

## DIMENSIONS


Note: drawings not to scale

## LEVER OPTIONS

See SRH501P page 25

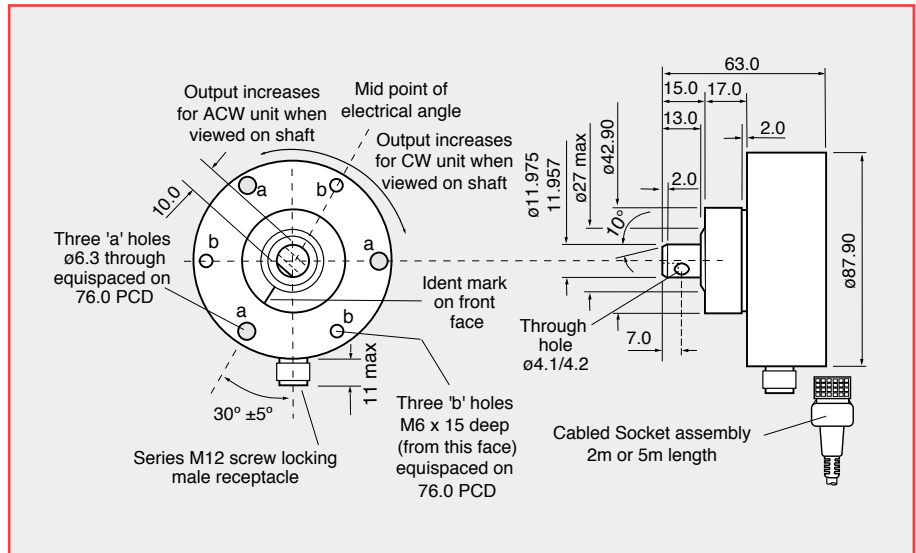

## SHAFT FLAT DETAIL



## ELECTRICAL CONNECTIONS

### Straight cabled socket

E series M12 to IEC 61076-2-101(Ed.1)

/IEC 60947-5-2,

PUR jacket

Conforms to VDE 0472 part 804

Cable temperature range -25 to +90°C

Pin No.	Cable colour	Description
1	Brown	0V Supply (GND)
2	Not connected	
3	Blue	+V Supply
4	Black	Output

Output increases with CW or ACW rotation viewed on shaft - depending on selected order code

**Cabled socket**  
 2 metre long No. X61-169-102  
 5 metre long No. X61-169-105


When connecting the sensor, care should be taken with the correct connections. The sensor is provided with indefinite reverse polarity protection and short circuit protection between output (Pin 4 - Black) to GND (Pin 1 - Brown), **but if the output (Pin 4 - Black) is connected to the supply this will result in device failure.**




# TEMPERATURE AND OUTPUT GRAPHS

## MAXIMUM OPERATING TEMPERATURE - DERATING GRAPHS


### SRH280P

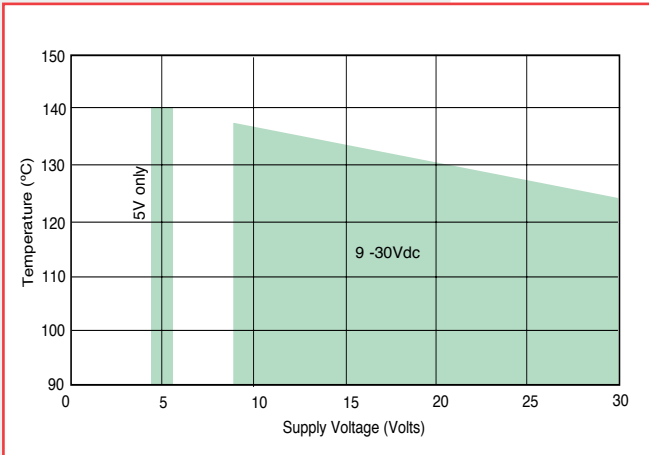


### SRH280DP, NRH280DP, TPS280DP, SRH220DR SRH501P/502P (not A2 & A3 options)

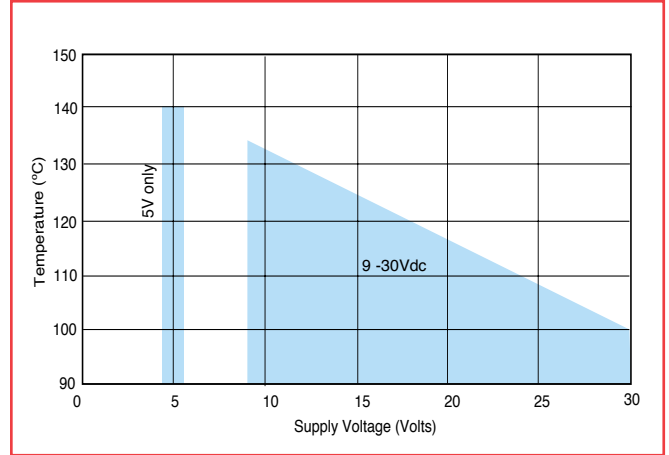


### SRH220DR, SRH501P/502P - OUTPUT A2

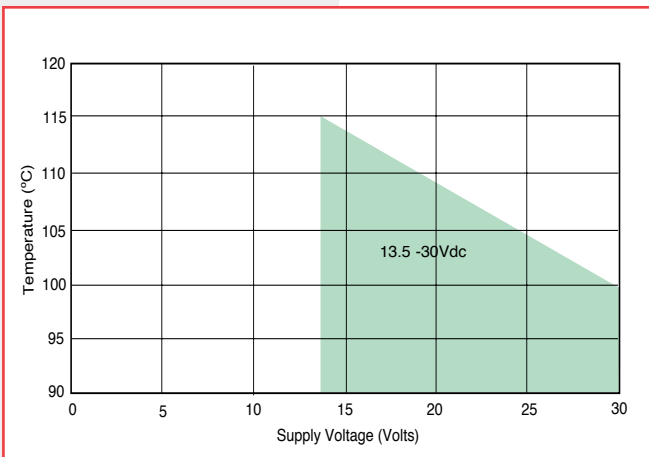

### SRH501P/502P - OUTPUT A3

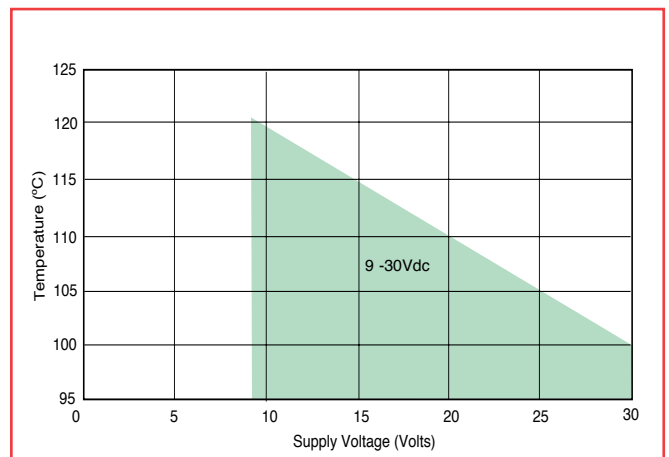


### A3 Typical temperature slope characteristic (can be used for compensation)

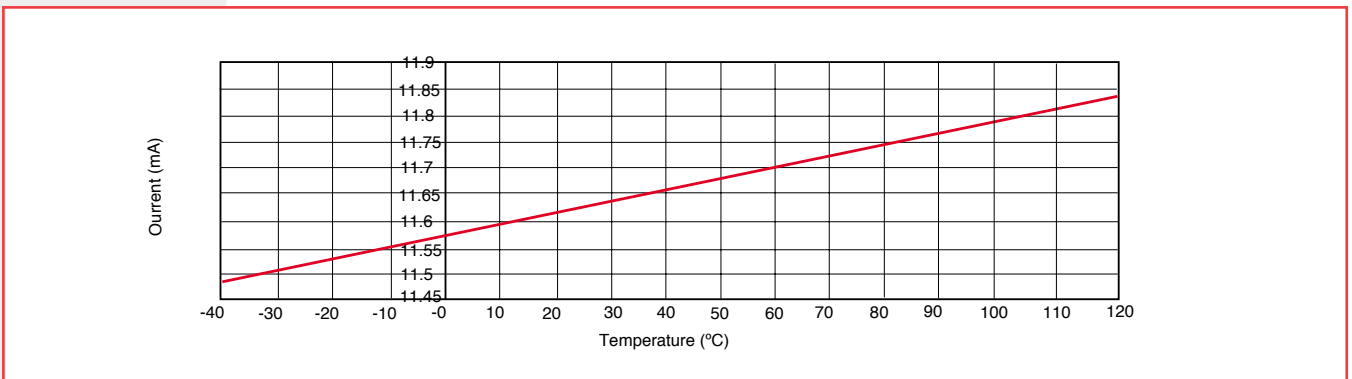


## SENSOR OUTPUT GRAPH- examples for three different angles


SRH280P, SRH280DP, NRH280DP, NRH285DR, TPS280DP, SRH220DR - OUTPUT A1  
 SRH501P/502P - OUTPUT A1  
 SRH880P - OUTPUT A

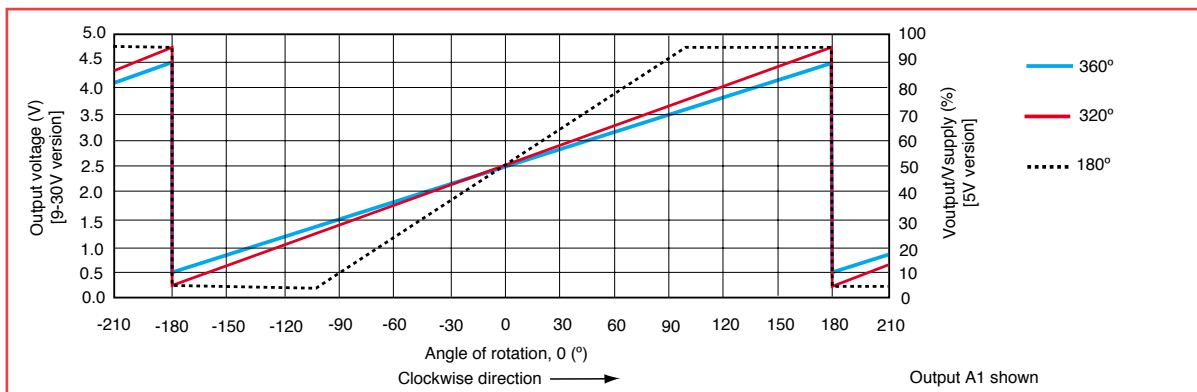

SRH220DR, SRH501P/502P - OUTPUT A2 (0-10Vdc)

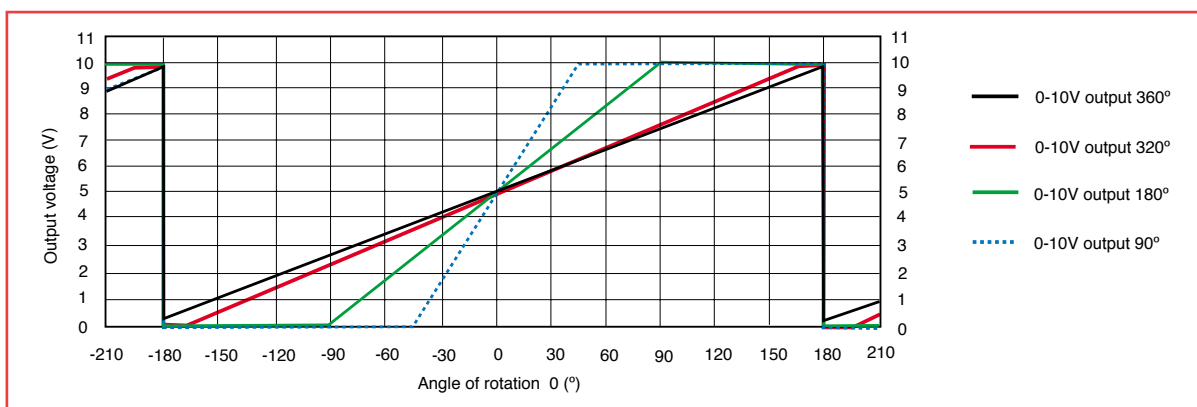


SRH501P/502P - OUTPUT A3 (4-20mA)

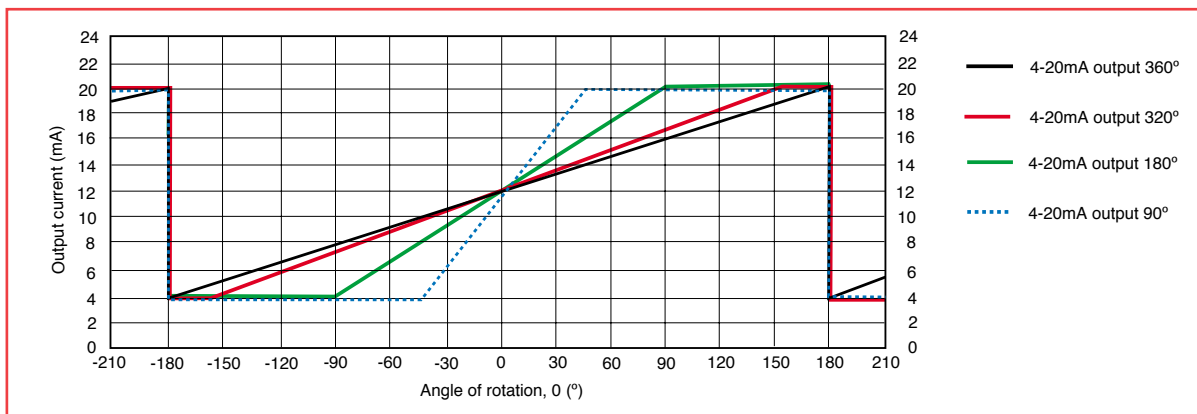

## PWM OUTPUT CHARACTERISTICS

SRH280P, SRH280DP, NRH280DP, NRH285DR, TPS280DP, SRH220DR - OUTPUT P1, P2, P3  
 SRH501P/502P - OUTPUT P1, P2, P3  
 SRH880P - OUTPUT P

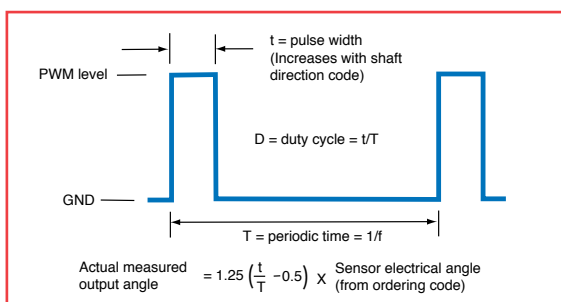

PWM levels = zero volt and 5V ( $\pm 3\%$ ) for 9-30V supply  
 = zero volt and  $V_s$  ( $\pm 1\%$ ) for 5V supply