

IPC-603

2U 3-Slot Rackmount Chassis for ATX/ MicroATX Motherboard with Front I/O



Features


- Front I/O, short depth 2U chassis (308 mm)
- Shockproof drive for slim ODD and one 3.5" HDD
- Equipped with 350W single power supply
- Easy-to-replace air filters

CE FCC


Specifications

Drive Bay	Slim Optical Disk Drive	External	1	Internal	-
	3.5"	-	-	1	-
Cooling	Fan	2 (8 cm/47 CFM each)			
	Air Filters	3 (85 x 80 mm)			
Miscellaneous	Notification LEDs	Power & HDD activity			
Environment	Temperature	Operating	0 ~ 40 °C (32 ~ 104 °F)		
	Humidity	Non-Operating	-20 ~ 60 °C (-4 ~ 140 °F)		
	Vibration (5 ~ 500 Hz)	Operating	10 ~ 85% @ 40 °C, non-condensing		
	Shock	Non-Operating	10 ~ 95% @ 40 °C, non-condensing		
	Weight	1 G	2 G		
Physical Characteristics	Dimensions (W x H x D)	10 G (with 11 ms duration, half sine wave)			
	Weight	482 x 88 x 308 mm (19" x 3.46" x 12.1")			




Front View

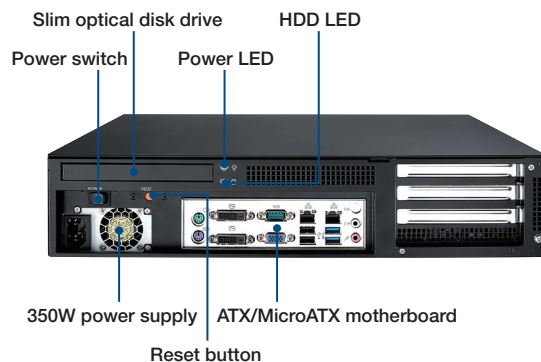


Inside View

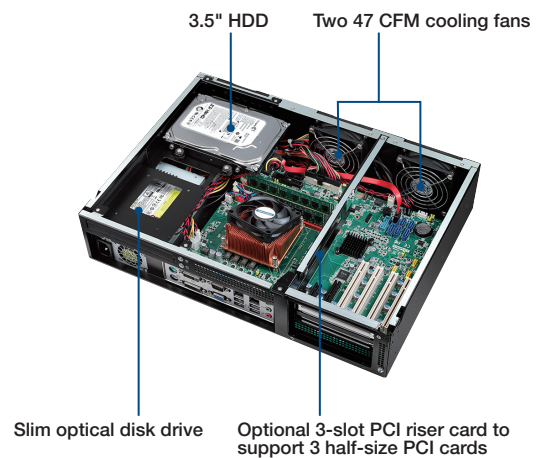

Dimensions

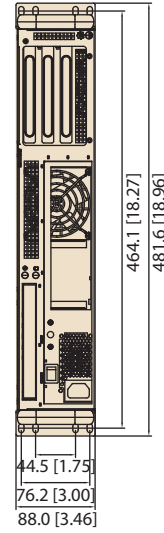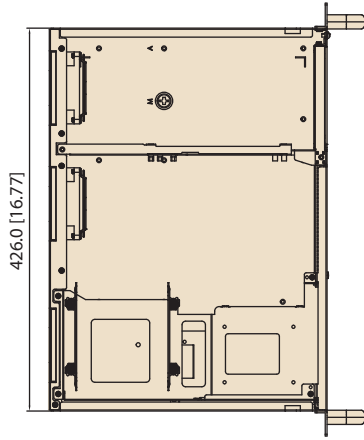

Unit: mm [inch]

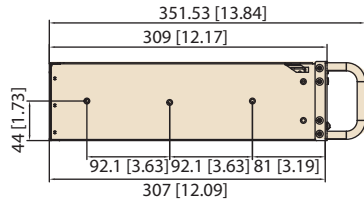

Ordering Information

Part Number	Power Supply	Wattage	Type	Input
IPC-603MB-35BE	PS8-350FATX-XE	350W	Single	AC 100 ~ 240 V full range

Optional Accessories

Part Number	Description
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)

Spare Parts

Part Number	Description
2130004795S000	Fan filter 80 x 85 x 5 mm