



Yuasa Fiche de données techniques

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX7096 - Batteries EFB YBX7000 Start Stop Plus

Performance

| | |
|-----------------------------------------|------|
| Tension | 12V |
| Capacité (20 heures) | 75Ah |
| Performances en démarrage à froid (EN1) | 700A |

Dimensions

| | |
|----------|-------|
| Longueur | 278mm |
| Largeur | 175mm |
| Hauteur | 190mm |

Poids & Mesures

| | |
|------------------------|--------|
| Poids moyen avec acide | 19.3kg |
|------------------------|--------|



Caractéristiques du bac

| | |
|--------------------------------|--------------------------------------------------|
| Type de bac | L3 DIN EFB |
| Système de fixation | B3 |
| Indicateur de l'état de charge | ✓ |
| Poignées | ✓ |
| Sortie(s) d'aération | ✓ |
| Type de couvercle | Double capot (anti-écoulement et sans entretien) |

Technologie

| | |
|---------------------------|-------------|
| Dispositif stop-flamme | ✓ |
| Technologie | Ca/Ca |
| Séparateur | PE |
| Test de retournement VDA | ✓ |
| Taux de charge recommandé | 4A |
| Performance Marking | W3-C2-V3-M1 |

Type de bornes

T1

Standard DIN Post



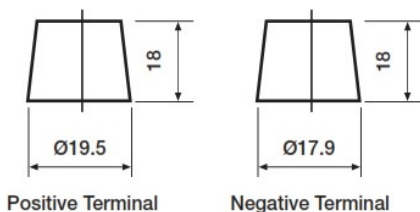


Schéma de montage des éléments

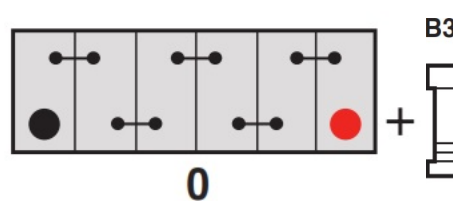

Système de fixation de la batterie

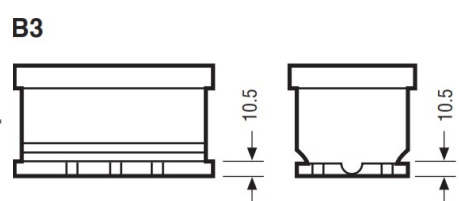

Date de publication: 10/02/2021 - E&OE



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX7096 - YBX7000 EFB Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 75Ah |
| Cold Cranking Amps (EN1) | 700A |

Dimensions

| | |
|--------|-------|
| Length | 278mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 19.3kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | L3 DIN EFB |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca |
| VDA Roll Over Test | PE |
| Recommended Charge Rate | ✓ |
| Performance Marking | 4A |
| | W3-C2-V3-M1 |

Terminal Type

T1


Standard DIN Post

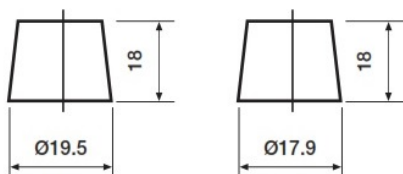


Positive Terminal

Negative Terminal

Cell Assembly Layout

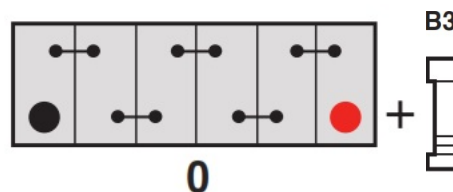

Battery Hold-down

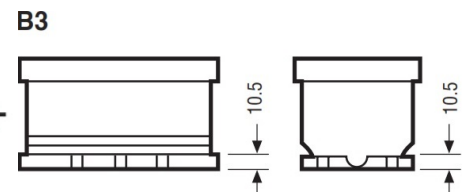

Data Sheet generated on 10/02/2021 - E&OE