

CCL D2



Windows



Multifunctional
Interface



Low power
consumption





Fan-free

Actual product is subject to technical changes.

CCL TECH SAS
info@cclyun.com

CCL D2

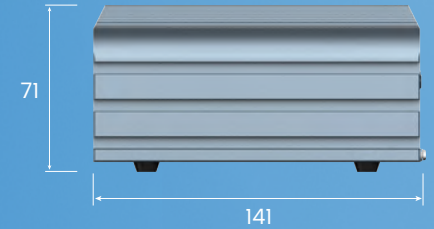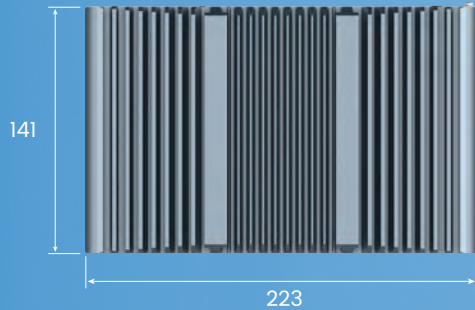

Technical Data

CPU	Intel® Core™ i3-1115G4 2C/4T 4.10GHZ 6MB、 Intel® Core™ i5-1135G7 4C/8T 4.20GHz 8MB
Memory	DDR4 SO-DIMM default 4GB.max.32GB
Hard Disk	M.2 2280 SSD default 128GB, max.512GB
Controller	Intel® HD Graphics 520 HDMI x 2
External Interface(front)	PWR SW + PWR LEDx1,USB2.0 x4,POWER USB 12Vx 1
External Interface(back)	DC-IN 24V*1,POWERUSB 24V*1,POWERUSB 12V*2USB2.0*2,USB3.0*4,RJ11*1,COM*4, HDMI*2,LAN*2HP JACK*1
Power Adapter	Input: AC 100~240V 50/60Hz.2~2.5AOutput: DC 24V 5A
Operating System	Win 10
Operating Temperature	-10° ~ +40°
Storage Temperature	-20° ~ +60
Humidity	Relative humidity ≤85%, no condensation
Restricted Altitude	Lower than 5000 meters

