

15" Resistive Touch Monitor



- High resolution support (e.g. 768p, 1920×1200 pixels)
- Suitable for usage with HTPC, in industrial area, kiosk systems, for machine control, home automation, on farm machinery and many other areas
- Extra robust components, mountable, Backlight LED, high quality pedestal
- VESA 100 mounting


Experience a new working environment with faytech's 15"-22" Touchscreen Monitor Series. These monitors are packed with features and connectors that make them perfect in any industrial or commercial application. Each Touchscreen Monitor is built using an industrial LCD panel with backlighting (40,000+ hour lifespan), 5-wire resistive touch and anti-glare coating to enhance the user's performance and of course includes faytech's 100% guarantee of no defective pixels.

The 15"-17"-19" models have VGA and DVI-D connectors, with additional S-Video and HDMI connections added to the 22" version. Each monitor comes with its own desktop stand, and screw patterns on the back for VESA-100 mounts, so it can be used in a variety of configurations in industrial and commercial environments.

The high resolution support (e.g. 768p, 1920×1200 pixels) of these faytech touchscreens make them the perfect choice for a wide variety of applications including use in POS systems, as control panels in the industrial area, in kiosk systems, for machine control, in the office and in many other areas.

The integrated touch panel is robust and accurate. The touch function is quickly established via the USB port of your PC, and industrial users can connect the touch function through the serial port. faytech includes touchscreen drivers for popular Microsoft (CE, WinXP, Vista), Mac and Linux operating systems. For Win7, Win8 and Win10 operating systems no driver installation is needed because the MER4485 chipset used in faytech's in-house designed touch controller supports Login using virtual keyboard and immediate use of windows gestures making starting and using Windows 8 or 10 incredibly easy.

Customization is available for project customers (e.g. higher brightness, brightness sensor, IP protection classes, integrated power supply, webcam, scanners, printers, capacitive and SAW touch panels, etc.)



| | |
|---------------------------------|------------------------------------|
| Product name | 15" Resistive Touch Monitor |
| Article code / EAN numer | FT15TMB / 6920734015115 |

| Anti-glare LCD Panel | |
|---|--------------|
| IP rated front panel | IP40 |
| Screen diagonal (Inch/cm): | 15/38.10 |
| Display active screen size: | 130.40×22.80 |
| Aspect ratio: | 4:3 |
| Physical resolution: | 1024×768 |
| Maximum showable resolution (TPCs: external): | 1920×1200 |
| Colours displayed: | 16.2M |
| Brightness (cd/m2): | 300 |
| Contrast: | 700:1 |
| Typical reaction time Tr/ Tf (ms): | 8/8 |
| Visual Angle horizontal/vertical (°): | 160/160 |
| Backlight / Backlight Lifetime (hours): | LED / 40,000 |



| External Connectors | |
|---------------------|-----------------|
| Video | 1x VGA |
| | 1x DVI-D |
| Audio | 1x Audio-In |
| | 1x Earphone-Out |
| Touch Connector | 1x USB |
| | 1x Serial |
| Connectors | 1x 12V DC-IN |

| Touch Panel | |
|-----------------------|--------------------------------|
| Touch Technology | 5-Wire Resistive |
| Touch Connector | USB & Serial |
| Touch Panel Drivers | Windows; Linux; Mac; Android |
| Touch Life (Contacts) | 10 million touch in 1 location |
| Surface Hardness | 3H |

| Operation / Mechanical | |
|----------------------------|------------------------|
| Operating Temperature (°C) | -10 ~ +60 |
| Humidity Range (RH) | 10%-90% |
| Net weight (kg) | 3.00 |
| Gross weight (kg) | 5.00 (incl. cartilage) |
| Housing material | Plastic |
| Housing (cm) LxWxH | 37.00 x 28.70 x 5.50 |
| Mounting | VESA 100 |

| Power | |
|--------------------------|--|
| Power Indicator | Green LED |
| Power Supply | 100-240V ACDC active switching; 12V DC-Out |
| Working Power (V) | 12 |
| Power Consumption (W) | 11 |
| Stand-By Consumption (W) | <1 |

| Included in the Delivery | |
|----------------------------------|--|
| Power Supply (see Power section) | |
| Stylus | |
| Driver DVD | |
| Short Installation Manual | |
| Cables - VGA, USB Touch | |
| Standard Stand | |

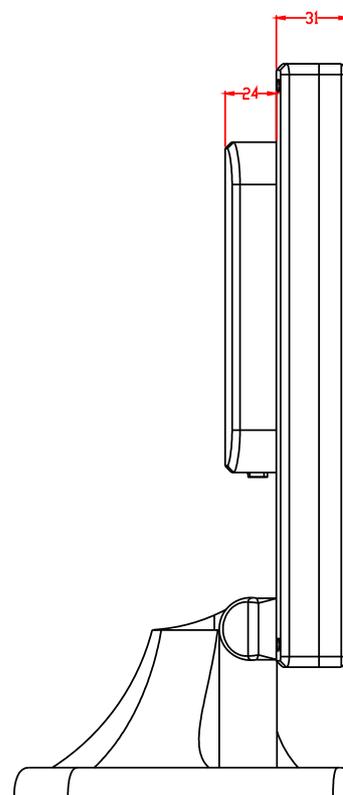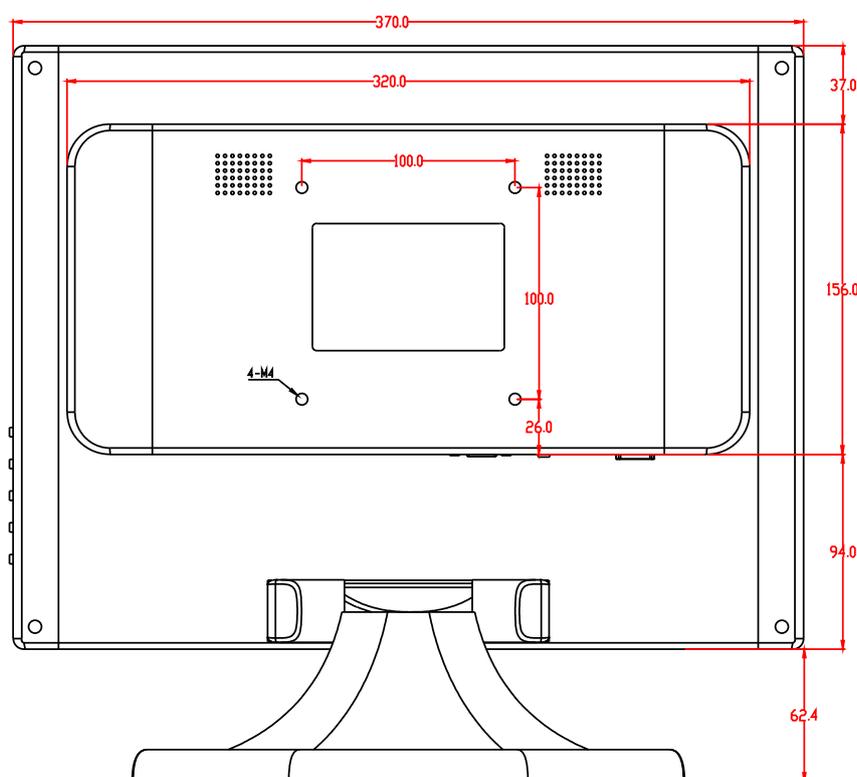

Corporate Headquarters

faytech Tech. Co., Ltd.
 Building F., Hongmen Tech. Zone,
 Jihua Rd., Shenzhen, China 518129

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 89580612
 Germany: +49 551 82098660
 USA: +1 646 205 3214