



Tret Up

External Lighting



Designer range luminaire for urban plazas, pathways, public and private green spaces, parks and gardens. Also available in bollard version (see separate leaflet).

Product Compliance: EN 60598; CE.

Construction: Die cast aluminium housing. IP65. IK10.

Lens: Polycarbonate lens.

Diffuser: Performance reflector as standard. Dark aluminium stacked louvre type for maximum cut-off on request. Clear polycarbonate lens.

Installation: Via Flange Plate to be cemented into ground.

Finish: Light Grey Finish as standard. Anthracite Grey on request.

LED: Available in 39w LED. 4K as standard, 3K on request.



Driver: Internal LED driver.

Options: DALI, RAL colours on request, 3 different heights.

Veelite



DIMENSIONS

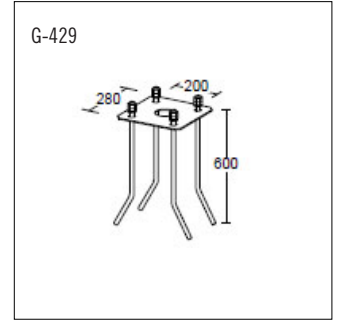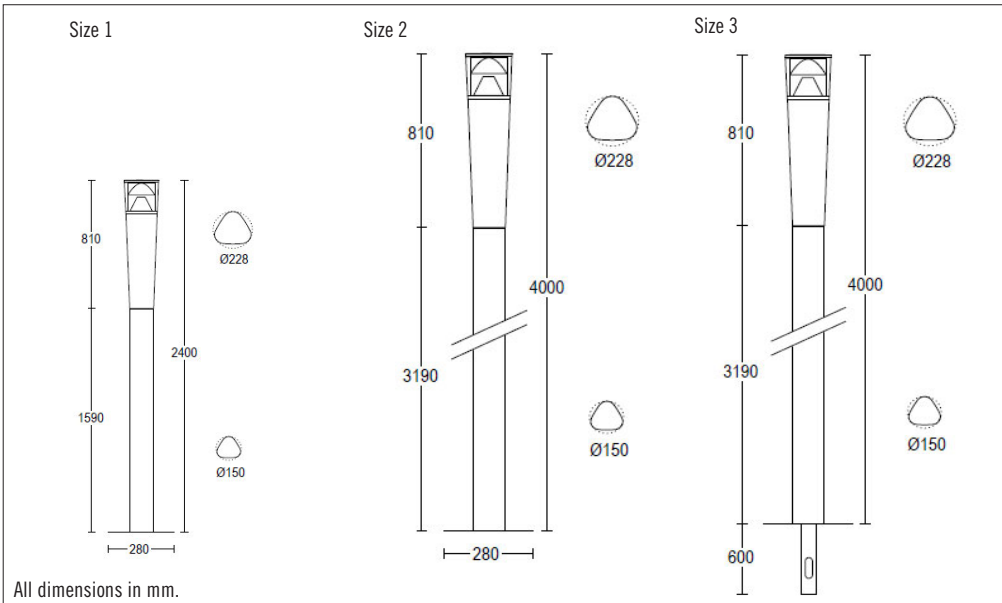

ORDERING CODE

Wattage	Type	Size	Code	Details	Lumens
39w	LED	1	G-8280.CHEA	Tret Up, 4K, 2.4m high	5090 lm
39w	LED	2	G-8285.CHEA	Tret Up, 4K, 4m high	5090 lm
39w	LED	3	G-8284.CHEA	Tret Up, 4K, 4m high	5030 lm
-	-	-	G-429	Flange Plate	-

OPTIONS

3K: 3000K, Warm White
.05: Anthracite Grey
.13: Light Grey Finish
DALI: DALI on request