




Senses Rackmount Display

Features



- 7U 17", 8U 19" 9U 20" rackmount LCD with DVI-D / VGA input
- Ideal for CCTV security & industrial control
- 17" / 19" / 20" Touchscreen : Resistive
- 2 year warranty

Dimensions

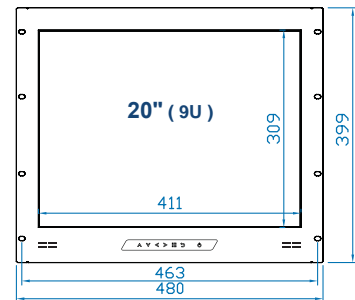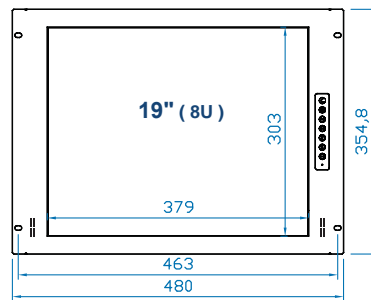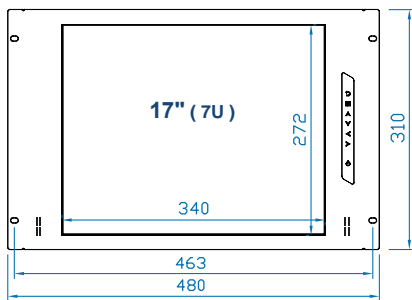

Senses Rackmount Display

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Model	17" TFT	19" TFT	20" TFT	
Max resolution	1280 x 1024	1280 x 1024	1600 x 1200	
Brightness (cd/m2)	250	250	300	
Backlight	LED	LED	CCFL	
Colors	16.7 M	16.7M	16.7M	
Contrast ratio (typ)	1000 : 1	1000 : 1	800 : 1	
Viewing angle (L/R/U/D)	85/85/80/80	85/85/80/80	89/89/89/89	
Active area (mm)	337.92H x 270.33V	376.32H x 270.33V	408H x 306V	
MTBF (hrs)	30,000	30,000	45000	
Signal input	VGA and DVI-D	VGA and DVI-D	VGA and DVI-D	
Weight	Net	6.5 kgs (14 lbs)	7 kgs (15 lbs)	8.5 kgs (18.7 lbs)
	Gross	8.5 kgs (19 lbs)	9 kgs (20 lbs)	11 kgs (24.2 lbs)
Operating Temp	0 to 55°C Degree			
Storage Temp	-20 to 60°C Degree			
Relative humidity	5~90%, non-condensing			
Shock	10G acceleration (11 ms duration)			
Vibration	10~300Hz 0.5G RMS random vibration			
Regulatory	FCC, CE			
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz			
Consumption	Max. 25 Watt Saving mode 4 Watt Standby 1Watt		Max. 48 Watt Saving mode 4 Watt Standby 1Watt	
Product Dimensions	480 x 54 x 310 mm / 18.9 x 2.1 x 12.2 inch	480 x 53 x 355 mm / 18.9 x 2.1 x 14 inch	480 x 64 x 399 mm / 18.9 x 2.5 x 15.7 inch	
Packing Dimensions	529 x 124 x 495 mm / 20.8 x 4.9 x 19.5 inch	529 x 124 x 495 mm / 20.8 x 4.9 x 19.5 inch	583 x 124 x 529 mm / 23 x 4.9 x 20.8 inch	