


36 KEY COMMANDER KEYBOARDS WITH 25mm TRACKBALL

IP65 sealed



This “commander” is built around 36 short travel, tactile feel switches - numeric, function and control keys - and a compact 25mm trackball. The condensed but well defined key layout combined with the use of a compact trackball enables a fast and comfortable access to the most important machine commands and an accurate control of the cursor. Typical applications are navigation control, general machine control, public access terminals, security systems, .. and any applications requiring only a limited number of key functions with easy, fast and comfortable access and control.

MAIN FEATURES

- 36 short travel keys with tactile feel, 2.55N operating force
- Integrated 25 mm industrial grade trackball with removable ball

Panel mount version

- Front of panel mounting by eight M3 mounting studs
- Added silicon sponge seal for perfect sealing into the user's panel
- Dimensions / weight : 182 x 135 x 25 mm / 0,3 kg

Enclosed version

- The keyboard is mounted in a very stylish and robust ABS housing
- Dimensions / weight : 212 x 165 x 27 mm / 0,7 kg

GENERAL TECHNICAL SPECIFICATIONS

Sealing	: IP65 sealed
Keys	: 36 tactile short travel keys
Pointing Device	: 25 mm trackball
Output	: 1,6 m. PS/2 or USB cable(s)
Power requirements	: Directly from PS/2 or USB port
Operating temp.	: 0°C to +60°C
Front layer	: Black polyester front layer with embossed keys, scratch and chemical resistant

CONNECTIVITY

The PS/2 keyboards are supplied with one 1,6 m long shielded straight cable ended with a PS/2 type A plug. The USB versions are supplied with one 1,6m long shielded straight cable ended by a USB type A connector. Use the US-keyboard driver standardly available in your operating system.

** Due to the increasing differences of PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.*

ORDER INFO

LAYOUT	PANEL MOUNT	ENCLOSED
n.a.	KSTC36 F1 xxx	KSTC36 S1 xxx


xxx = protocol output : PS/2 or USB

36 KEY COMMANDER KEYBOARDS WITH 25mm TRACKBALL

IP65 sealed

DIMENSIONAL DRAWING

Panel mount version

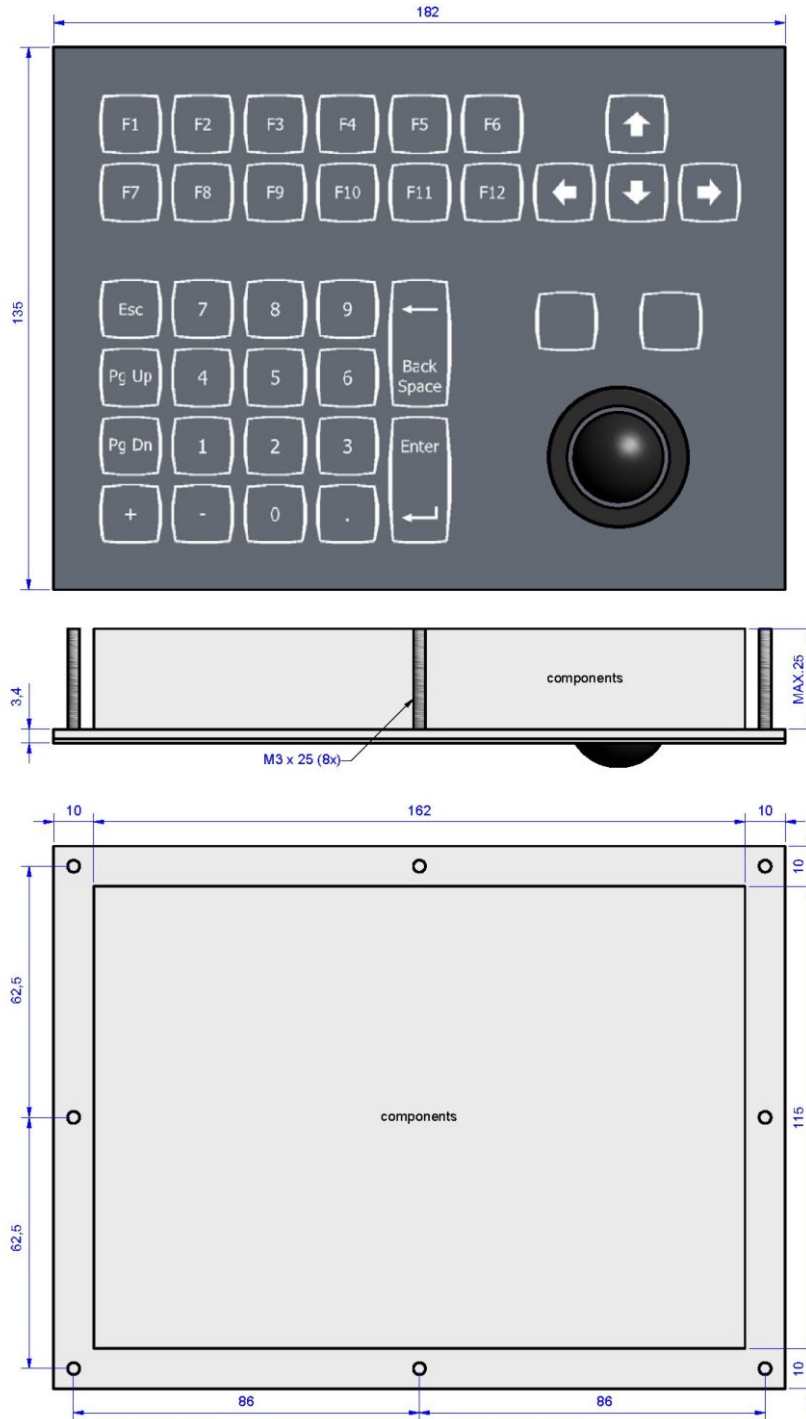

Dim in mm.

COLOURS

Keyboard background : RAL7016 anthrasite grey

Key edges & legends : RAL9016 Traffic white

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.