



## Main Features

- ◆ Support 3<sup>rd</sup> generation Intel® Core™ i5/ i3 rPGA socket type processor
- ◆ Mobile Intel® QM77 PCH
- ◆ Support 1x 2.5" SATA HDD or 2x SATA DOM
- ◆ 1x VGA, 1x DVI-D and 2x Display port with Independent Display support
- ◆ Dual Intel® GbE LAN ports
- ◆ 4x USB 3.0, 2x USB 2.0, 5x RS232 and 1x RS232/422/485
- ◆ 1x internal mini-PCIe socket support Wifi or 3.5G module
- ◆ 1x external CFast socket, 1x SIM card socket, One PCIe4 expansion
- ◆ Support 9V~30V DC input
- ◆ Support ATX power mode and WoL

## Product Overview

Integrated with 3rd generation Intel® Core™ i5/i3 with QM77 PCH platform, NISE series evolve to a new generation called NISE 3600 series. It is not only sustained its good reputation on quality and user friendly features but also innovated its mechanical design.

With computing and graphic performance enhancement, NISE 3600 series supports 2x display port, 1x VGA port and 1x DVI-D port to fulfill the graphic-intensive or computing oriented applications, including Auto Optical Inspection, Machinery Automation, ePolice infotainment, Surveillance or Image Processing equipments and Healthcare industry. In addition, NISE 3600 series offers 4x USB 3.0 and 2x USB 2.0, greater expansion capability with 2x Intel® GbE LAN ports, 6x COM ports, and 1x external CFast socket for front accessible availability. NISE 3600 series is sufficient to support wide range of DC input from 9~30V, ATX power mode and WoL; it is a new generation to meet most application requirements.

## Specifications

### CPU Support

- ◆ Support 3<sup>rd</sup> generation Intel® Core™ i5/i3 rPGA Socket Type Processor
  - Core™ i5-3610ME, Dual Core, 2.7GHz, 3M Cache
  - Core™ i3-3120ME, Dual Core, 2.4GHz, 3M Cache
- ◆ Support Three Independent Display with above processors
- ◆ Support 2<sup>nd</sup> generation Intel® Core™ i5/i3 rPGA Socket Type Processor
  - Core™ i5-2510E, Dual Core, 2.5GHz, 3M Cache
  - Celeron® B810, Dual Core, 1.6GHz, 2M Cache
- ◆ Support Dual Independent Display with above processors

### Main Memory

- ◆ 2x DDR3 SO-DIMM socket, supports up to 8GB DDR3/ DDR3L 1333/ 1600 SDRAM, with un-buffered and non-ECC

### Display Option

- ◆ Three Independent Display (only support on 3<sup>rd</sup> Generation Processor)
  - Two Display Port and 1x VGA
  - Two Display Port and 1x DVI-D
- ◆ Dual Independent Display
  - VGA and DVI-D
  - Display Port and VGA
  - Display Port and DVI-D
  - Display Port and Display Port


### I/O Interface-Front

- ◆ ATX power on/ off switch
- ◆ HDD Access/ Power status LEDs
- ◆ 2x USB3.0 ports (Blue Color)
- ◆ 2x Display Port (Can be converted to DVI-D or HDMI via cables)
- ◆ 2x Antenna holes
- ◆ 1x external CFast (optional)
- ◆ 1x SIM card socket

### I/O Interface-Rear

- ◆ 2x DB9 for COM5 & COM6 (RS232)
- ◆ 1x DB44 Serial Port, 4x COM port
  - COM1/COM3/COM4: RS232
  - COM2: RS232/422/485
- ◆ 2x Intel® GbE LAN ports (Intel 82574L and 82579LM)
- ◆ 2x USB2.0 ports
- ◆ 2x USB3.0 ports (Blue Color)
- ◆ 1 x DB15 VGA port
- ◆ 1 x DVI-D port
- ◆ 1 x Line-out and 1x Mic-in
- ◆ 2-pin Remote Power on/ off switch
- ◆ 9~30V DC input

## Dimension Drawing

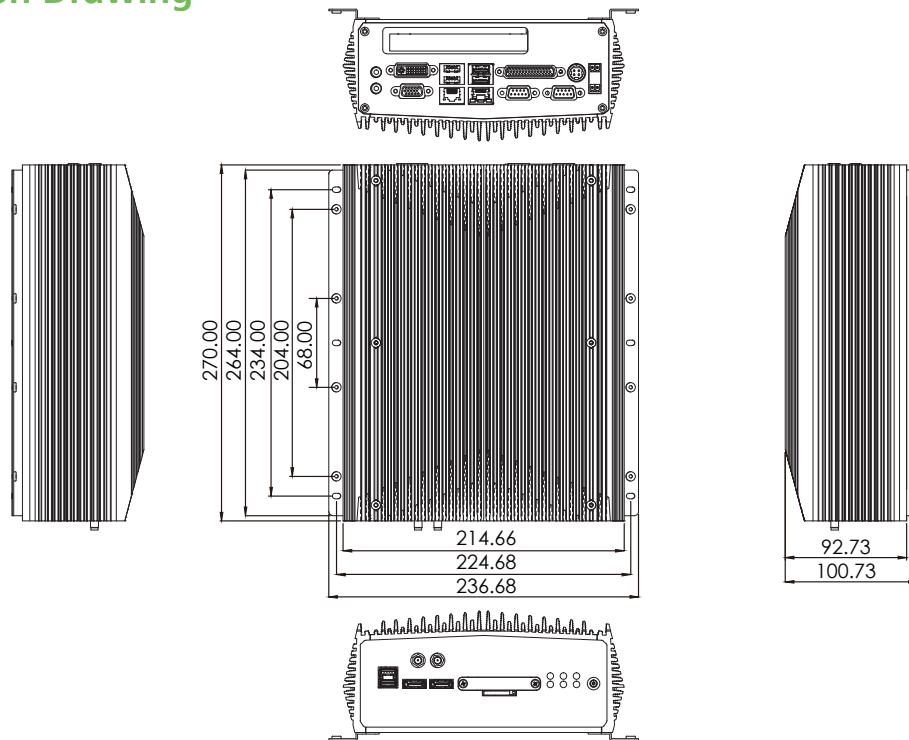

### Storage Device

- 1x CFAST socket
- 1x 2.5" SATA HDD or 2x SATA DOM
- SATA DOM: support 90 degree horizontal type only

### Expansion Slot

- One PCIe4 Expansion Slot
  - Add-on card length: 169mm max.
  - Power consumption: 10W/slot max.
- 1x miniPCIe socket (support optional WiFi or 3.5G module)

### Power Requirements

- ATX power mode
- On-board DC to DC power support from 9V to 30V DC
- Optional power adapter

### Dimensions

- 215mm (W) x 272mm (D) x 93mm (H) without wall mount bracket

### Construction

- Aluminum Chassis with fanless design

### Environment

- Operating temperature:
  - Ambient with air flow: -5°C ~ 55°C
  - (According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 95% at 40 degree C
- Shock protection: 20G, half sine, 11ms, IEC60068-2-27
- Vibration protection
  - Random: 0.5Grms @5~500 Hz according to IEC68-2-64
  - Sinusoidal: 0.5Grms @5~500 Hz according to IEC68-2-64

### Certifications

- CE approval
- FCC

## Ordering Information

### Barebone

- **NISE 3600E (P/N: 10J00360000X0)**  
3<sup>rd</sup> Generation Intel® Core™ i5/i3 rPGA Fanless System with one PCIe4 Expansion
- **NISE 3600E2 (P/N: 10J00360001X2)**  
3<sup>rd</sup> Generation Intel® Core™ i5/i3 rPGA Fanless System with two PCIe4 Expansion
- **NISE 3600P2 (P/N: 10J00360002X0)**  
3<sup>rd</sup> Generation Intel® Core™ i5/i3 rPGA Fanless System with two PCI Expansion
- **NISE3600P2E (P/N: 10J00360003X0)**  
3<sup>rd</sup> Generation Intel® Core™ i5/i3 rPGA Fanless System with one PCI Expansion and one PCIe4 Expansion
- **19V, 120W AC/DC power adapter w/o power core (P/N: 7410120002X00)**